


RECOMMENDED P.C.B. LAYOUT

XDVI Part Numbering System

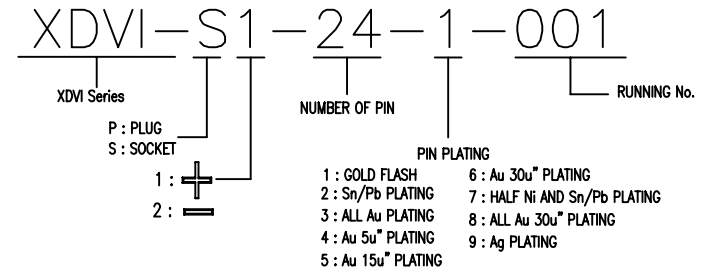

NOTE:

1. MATERIALS
 - . INSULATOR: GLASS REINFORCED THERMOPLASTIC UL94V-0.
 - . CONTACT: PHOSPHOR BRONZE.
 - . PLATING: GOLD ON CONTACT AREA AND TIN/LEAD ON SOLDER TAIL ALL WITH NICKEL UNDERPLATING.
 - . METAL BOARD LOCK: COPPER ALLOY WITH TIN PLATING.
 - . SHELL: ZINC ALLOY.
2. ELECTRICAL
 - . VOLTAGE RATING: 250 VAC (R.M.S.)
 - . CURRENT RATING: 1.5 AMP.
 - . INSULATION RESISTANCE: 2000 MΩMIN.
 - . DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC (R.M.S.)
 - . CONTACT RESISTANCE: 20mΩ MAX. (INITIAL)
3. ENVIRONMENTAL
 - . TEMPERATURE RANGE: -55°C TO +85°C
4. ALL DIMENSION ARE IN mmS.
5. GENERAL TOLERANCE: ±0.25mm.
6. UNSPECIFIED TOLERANCE: .XX ±0.13[0.005]
.X ±0.25[0.01]

XMULTIPLE		CONNECTING THE INFORMATION AGE
XMULTIPLE ASIA 3F, No. 60, Juluen St., Taipei, 104, Taiwan. R.O.C.	XMULTIPLE USA 543 Country Club Drive #B 128 Simi Valley, CA 93065	CUSTOMER/NO:
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG NO: XDVI-S1-24-1-001
TITLE: FEMALE DVI CONNECTOR INTEGRATED 24 - 180°		DRAWN: JEFF
PART NO: XDVI-S1-24-1-001		CHKD: C. TSAI
⊕	▢	DATE: 02/26/03
DIMENSIONS mm[inch]	SHEET 1 of 1	REV A