

1

2

3

4

5

6

7


更改 REV	出图日期 DATE	设变内容 MODIFICATION	修改 DRAWN
	2010/7/29	▲	

A

B

C

D

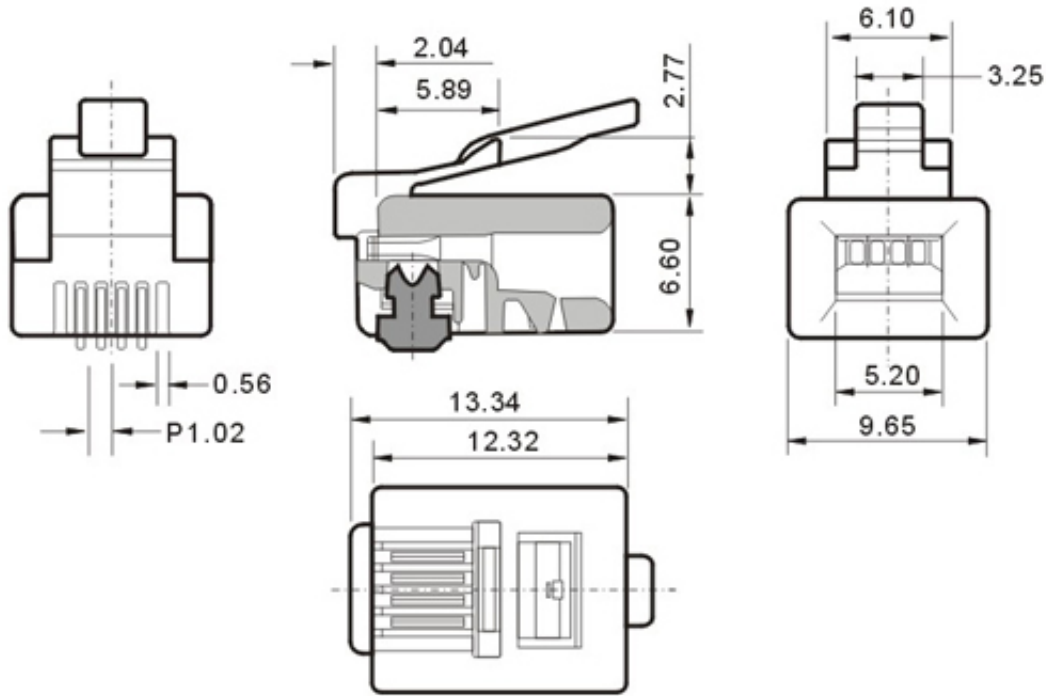

SPECIFICATIONS

1.ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
 INSULATION RESISTANCE: 100 M Ω.
 TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.

2.MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH: 20POUND MIN.
 DURABILITY: 200 MATING CYCLES.

3.MATERIAL & FINISH:

HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
 COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
 CONTACT BLADE: COPPER ALLOY.
 CONDUCTOR: STRANDED & SOLID WIRE.
 (It can be used for the wire OD from Ø 1.05~Ø1.15)
 GOLD PLATING: 3u"~50u", ARE AVAILABLE.

规范

1.电器:

UL应用最大250VOLTS AC.
 介质耐电压伏特数:500VOLTS AC.
 绝缘阻抗:100百万欧姆.
 终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.

2.机构

拉力测试:至少20磅.
 耐力测试:至少200次之插拔测试.

3.材质表面处理

塑胶壳:聚碳酸脂,UL-94V-0 or UL94V-2.
 颜色:透明,或者其他颜色亦可.
 金片:铜合金.
 导体:多股线&单股线.
 (芯线直径: φ1.05~φ1.15均可适用)
 镀金厚度:3u"~50u",皆可提供.

客户用产品图

XMULTIPLE TECHNOLOGIES,INC.

DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		材 质 MATERIAL PC	图 号 DWG NO. X11Z-RB-US606
.X±0.20	.X°±5°	名 称 TITLE 6P4C RJ11 PLUG	
.XX±0.10	.XX°±2°		
审 核 APPROVAL 沈红波	核 对 CHECKED 钟均江	制 图 DRAWN LiWenjuan	比 例 SCALE 2/1 角 法 PROJ.
		张 数 SHEET 1/1	更 改 REV B

1

2

3

4

5

6

7