


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2014/03/28	

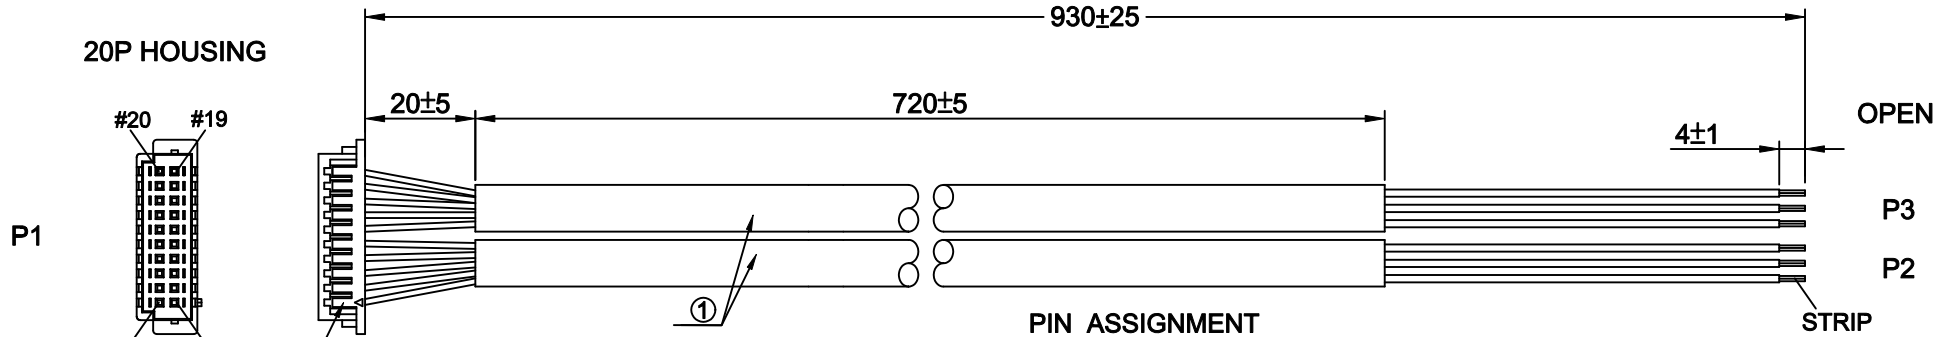

PIN ASSIGNMENT

P1	P2	P3
20P HOUSING	OPEN	
1	BLACK	
2	BROWN	
3	RED	
4	ORANGE	
5	YELLOW	
6	GREEN	
7	BLUE	
8	VIOLET	
9	GRAY	
10	WHITE	
11		OPEN
12		BLACK
13		BROWN
14		RED
15		ORANGE
16		YELLOW
17		GREEN
18		BLUE
19		VIOLET
20		GRAY
		WHITE

THE SECOND ROOT

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a). 100% OPEN, SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.01sec,
 - (c). CONTACT RESISTANCE: 3ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
3	20	B0288	TERMINAL:PITCH:1.25MM.(TU1257TPO-A)
2	1	B0287	HOUSING:PITCH:1.25MM 2*10P.(TU1257HNO-2*10)
1	2		28AWG*10C+F+AD OD:5.2MM GRAY PVC JACKET UL2464.

UNIT	mm	Projection		Xmultiple Technologies, Inc.			
DRAWN	<i>Deng ghifei</i>	SCALE	FREE	TITLE			
CHECK, BY		REV	A	HOUSING 20P TO OPEN			
APP, BY		DATE	2014/03/28	TOLERANCES			
DWG NO.	SE-S-0113			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	XCAB-SE-S-0113			SHEET	1/1	SIZE	A4