


RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2014/03/28	

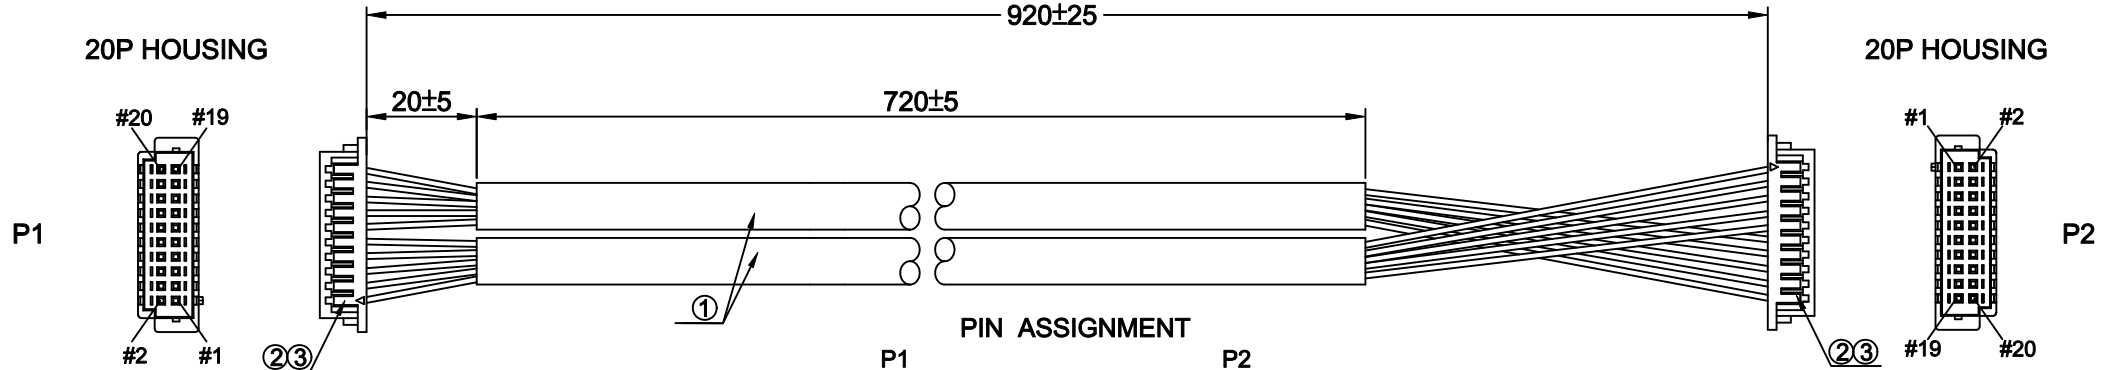

PIN ASSIGNMENT

P1 20P HOUSING		P2 20P HOUSING
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
7	BLUE	7
8	VIOLET	8
9	GRAY	9
10	WHITE	10
11	BLACK	11
12	BROWN	12
13	RED	13
14	ORANGE	14
15	YELLOW	15
16	GREEN	16
17	BLUE	17
18	VIOLET	18
19	GRAY	19
20	WHITE	20

THE SECOND ROOT

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a). 100% OPEN, SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.01sec,
 - (c). CONTACT RESISTANCE: 3ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
3	40	B0288	TERMINAL:PITCH:1.25MM.(TU1257TPO-A)
2	2	B0287	HOUSING:PITCH:1.25MM 2*10P.(TU1257HNO-2*10)
1	2		28AWG*10C+F+AD OD:5.2MM GRAY PVC JACKET UL2464.

UNIT	mm	Projection		Xmultiple Technologies, Inc.			
DRAWN	<i>Deng ghifei</i>	SCALE	FREE	TITLE			
CHECK, BY		REV	A	HOUSING 20P TO HOUSING 20P			
APP, BY		DATE	2014/03/28	TOLERANCES			
DWG NO.	SE-S-0114			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	XCAB-SE-S-0114			SHEET	1/1	SIZE	A4