


**RoHS COMPLIANT**

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2014/03/28	

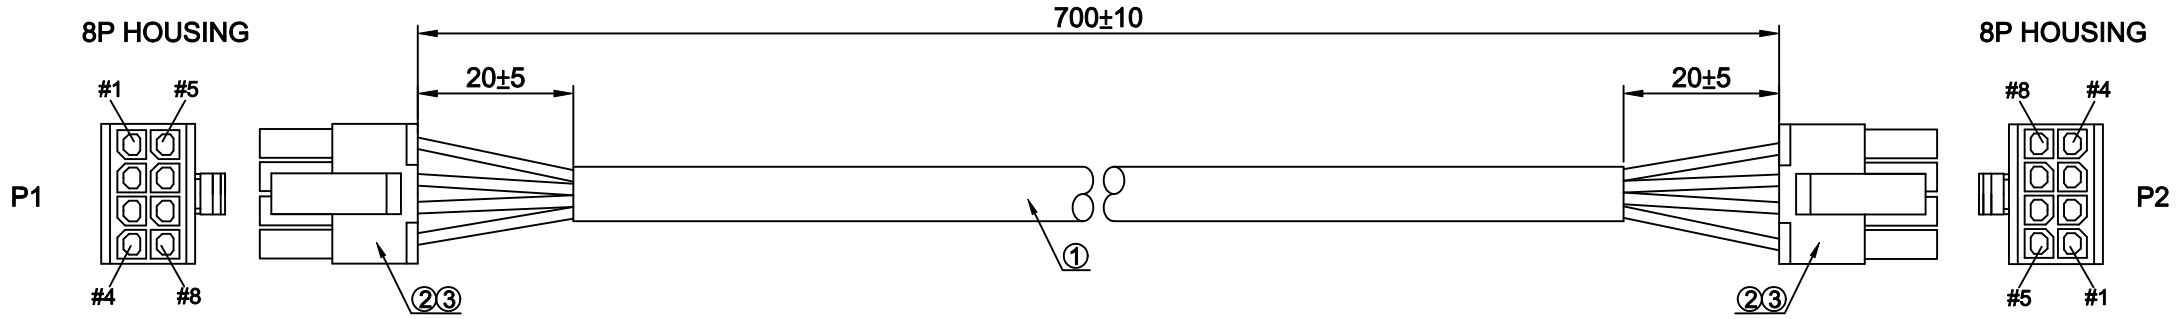

**PIN ASSIGNMENT**

P1 8P HOUSING	P2 8P HOUSING
1 _____	1 _____
2 _____	2 _____
3 _____	3 _____
4 _____	4 _____
5 _____	5 _____
6 _____	6 _____
7 _____	7 _____
8 _____	8 _____

**NOTES:**

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
  - (a). 100% OPEN, SHORT & MISWIRE TEST,
  - (b). INSULATOR RESISTANCE: 20 Mohm MIN.  
DC 300V 0.01sec,
  - (c). CONTACT RESISTANCE: 1ohm MAX.

ITEM	QTY	PART NUMBER	DESCRIPTION
3	16	B0264	TERMINAL: PITCH: 3.0MM. (JS-3025-T)
2	2		HOUSING: PITCH: 3.0MM 8P. (JS-3025-08)
1	1		20AWG*8C+F+AD OD: 7.0MM GRAY PVC JACKET UL2464.

UNIT	mm	Projection		<b>Xmultiple Technologies, Inc.</b>			
DRAWN	<i>Deng ghifei</i>	SCALE	FREE	TITLE			
CHECK, BY		REV	A	HOUSING 8P TO HOUSING 8P			
APP, BY		DATE	2014/03/28	TOLERANCES			
DWG NO.	SE-S-0115			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	<b>XCAB-SE-S-0115</b>			SHEET	1/1	SIZE	A4