



RoHS COMPLIANT

DESCRIPTION CONTROL			
REV	DESC	DATE	APP
A	FIRST RELEASE	2014/05/29	

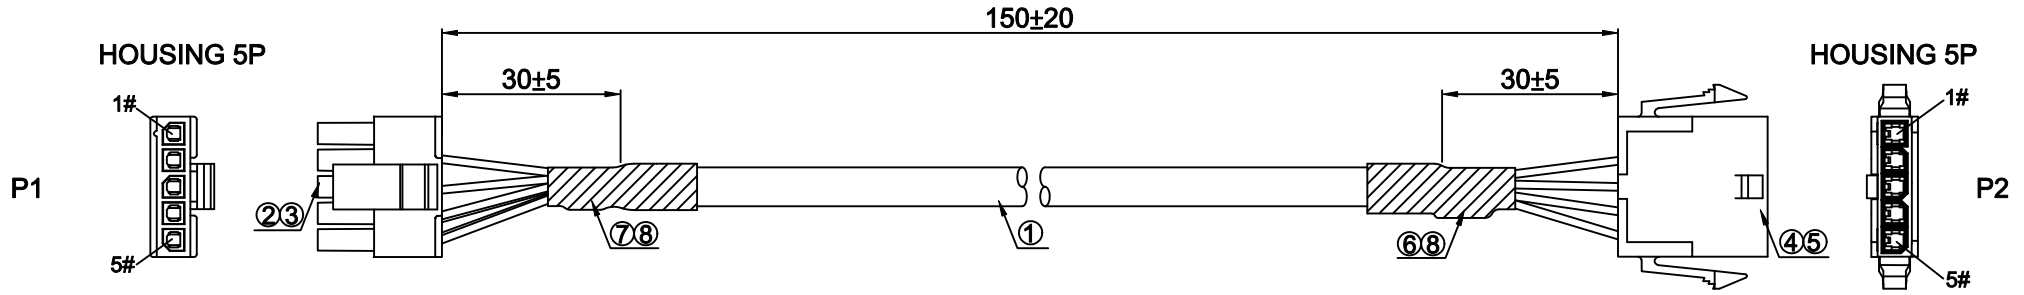

NOTES:
 1. PIN ASSIGNMENT SEE TO WIRE LIST.
 2. ELECTRICAL TEST CONDITION:
 (a).100%OPEN,SHORT & MISWIRE TEST,
 (b). INSULATOR RESISTANCE:20 Mohm MIN.
 DC 300V 0.01sec,
 (c). CONTACT RESISTANCE: 1ohm MAX.

PIN ASSIGNMENT

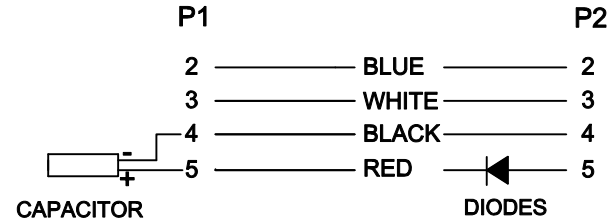

8	2		BLACK HEAT SHRINK TUBE.
7	1		CAPACITOR.
6	1		DIODES.(1N5400)-EQUIVALENT
5	4		TERMINAL:PITCH3.0MM.(43031-0005)
4	1		HOUSING:5P PITCH3.0MM.(43640-0500)
3	4		TERMINAL:PITCH3.0MM.(43030-0005)
2	1		HOUSING:5P PITCH3.0MM.(43645-0500)
1	1	E0417	24AWG*4C+AD, OD:4.7MM, BLACK PVC JACKET, UL2464.
ITEM	QTY	PART NUMBER	DESCRIPTION

UNIT	mm	Projection		Xmultiple Technologies Inc.			
DRAWN	<i>Deng zhifai</i>	SCALE	FREE	TITLE			
CHECK, BY	<i>Bao jiawei</i>	REV	A	HOUSING 5P/HOUSING 5P			
APP, BY	<i>Mr. Huang</i>	DATE	2014/05/29	TOLERANCES			
DWG NO.	SE-S-0131			X.= ±	.X= ±	.XX= ±	.XXX= ±
PART NO.	XCAB-SE-S-0131			SHEET	1/1	SIZE	A4