



# Dimensions

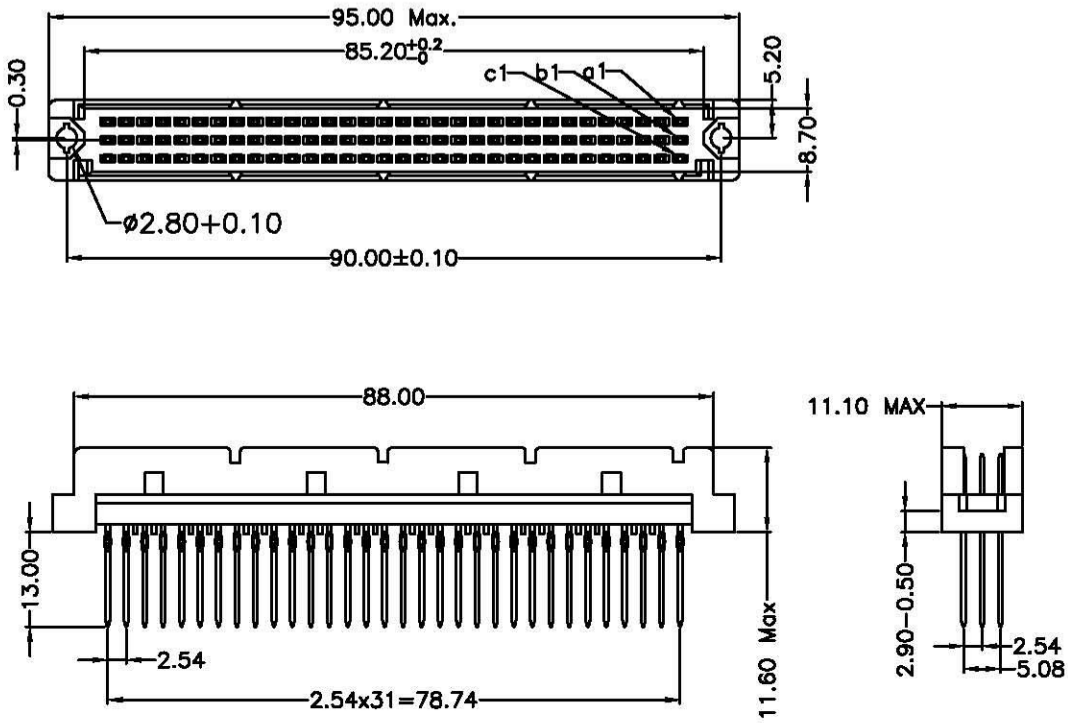

# Recommended P.C.B. layout

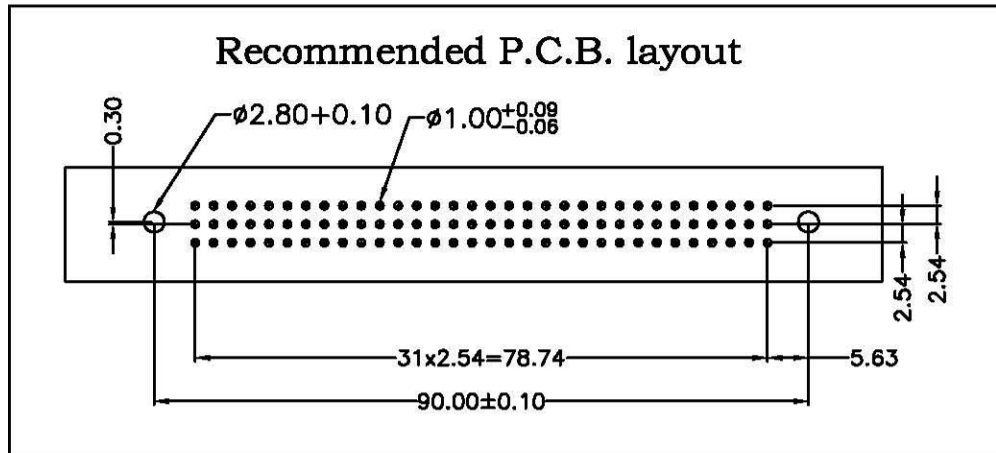

REVISIONS				
REV	DESCRIPTION	DATE	DRAWN	APPROVED
A0				

# DIN 41612 EUROCARD CONNECTORS

Vertical Male Type R Compliant Press-Fit Connectors  
96 positions

### Technical data

EURO DIN 41612:	Signal
Housing:	PBT & 30%Class Fiber(UL94V-0)
Contact:	Male : Brass
Plating:	2U" Au plated on contact area, Tin-plated on tail
Operating temperature:	-55°C~+105°C
Contact resistance:	20m(ohm)max.
Insulator resistance:	1000M(ohm)min.
Current rating:	2 AMP
Withstanding voltage:	AC 1000V for 1 minute
Contact Rating:	Class 3
RoHS Compliant	

MATERIAL:	DRAWN: <i>FJ</i>	06.06.88	XMULTIPLE		
FINISH:	CHECKED:		TITLE		
ALL DIMENSIONS ARE IN mm			XDIN-131-2-966-60-10LF-ALL		
THIRD ANGLE PROJECTION			PART NUMBER:		SERIES:
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:			DRAWING NUMBER	REV	SCALE
GENERAL TOLERANCE ANGLE TOLERANCE					SIZE
X. ±0.30 X' ±3.0°					SHEET
.X ±0.25 .X' ±2.0°					
.XX ±0.15 .XX' ±1.0°					
.XXX ±0.05 .XXX' ±1.0°					
			A0		A4
					1 OF 1