


Meets IEEE 802.3 Specification
 ROHS peak reflow temperature rating 245°C.
 10/100/1000 Base-T, Surface Mount Type, Open Header.
 Operating temperature range: -25°C to +85°C
 Storage temperature range: -40°C to +125°C


Electrical Specifications 25°C.

OCL(uH Min) 100KHz 0.2V	Turns Ratio	Insertion Loss (dB Max)	Return Loss (dB Min)			Cross talk (dB Min)		CMRR (dB Min)	HI-POT (Vrms)
With 8mA DC Bias	TX=1CT:1CT	0.5-100MHz	0.5-30MHz	30.1-60MHz	60.1-80MHz	0.5-40MHz	40.1-100MHz	0.5-100MHz	0.5-100MHz
350		-1.1	-18	-18+20 * log(f/30)	-12	-35	-33+20 * log(f/50)	-30	1500

Mechanical:

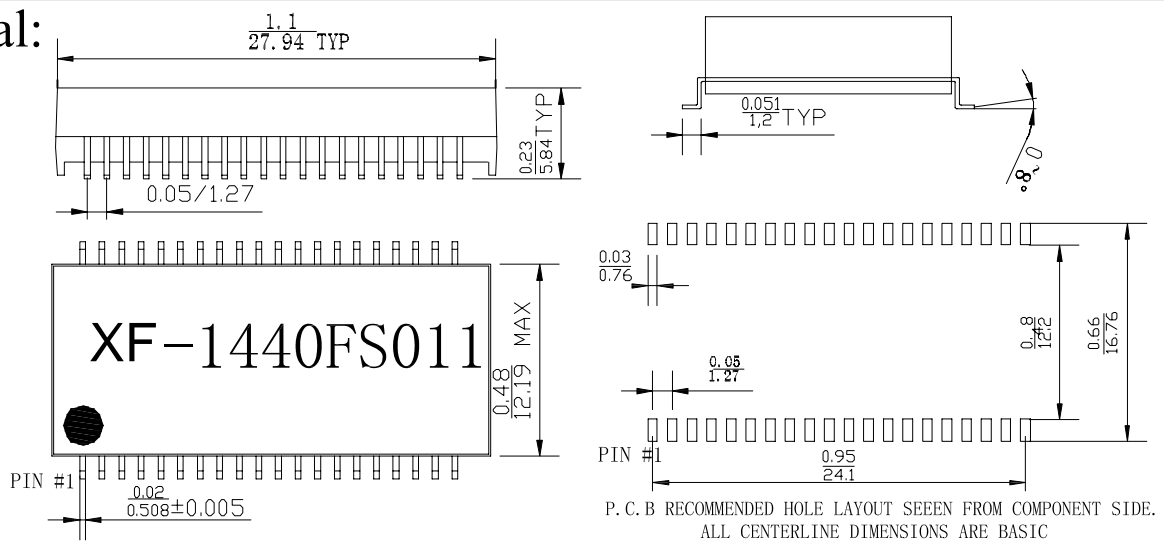

Schematic:

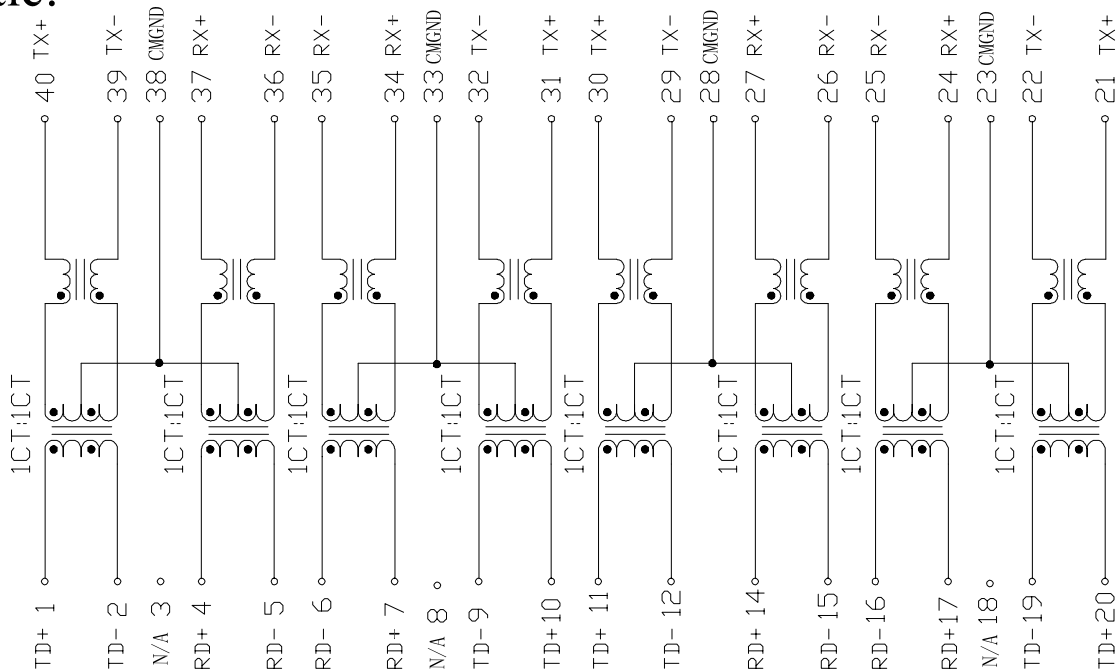

P/N: XF-1440FS011	Units: mm	Unless otherwise stated otherwise tolerances as follows: .XXX ±0.10 .XX ±0.25 .X ± 0.35 ANG ±3°	Rev: A	Draw : Kal	Date:2010/05/08
	Scale: None		Page: 1/1	Checked : Ansom	Date:2010/05/08
Tel: (805) 579-1100 Fax: (805) 579-7800			Approved: Ansom		Date:2010/05/08