


RECOMMENDED PCB LAYOUT
TOP VIEW

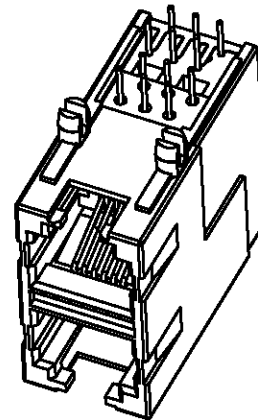

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Copper Alloy
 Optional Gold Plating Over Nickel
 CUL File No : E215573

PART NO : 8 2 6 6 - B * 1 - R

Positions ———— ↑ ———— Ports
 Contacts ———— ↑ ———— Gold Plated
 Housing Color ———— ↑ ———— 0 : Gold Flash
 B : Black 1 : 6u"
 2 : 15u"
 3 : 30u"
 4 : 50u"

XMULTIPLE TECHNOLOGIES, INC.					
TITLE 圖名	RJ11, Unshielded, Receptacle, Horizontal, 1x2 Port, THT			UNIT 單位	mm
PART NO. 料號	8266-B * 1-R			SCALE 比例	1 : 1
REV. 版本	A.0	DATE 日期	2011-01-05		
CHECKED BY 審核	Aaron		DRAWN BY 製圖	Lucy	

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 82 (SERIES)
(A)					TOLERANCE(公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm
(B)					
(C)					
(D)					
(E)					