
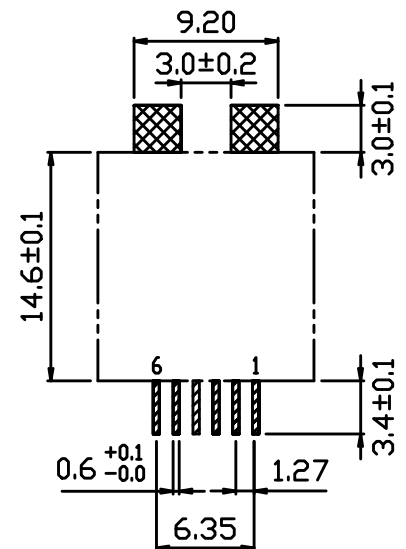


**MATERIALS:**

- HOUSING-PA9T GN2330  
HEAT RESISTANT POLYAMIDE RESIN  
BLACK COLOR, UL 94V-0
- CONTACTS-0.35mm THICK PHOS-BRONZE  
PLATED WITH 50μ' HARD GOLD AND  
GOLD FLASH IN SOLDER AREA.
- HOLD DOWN-0.35mm THICK COPPER ALLOY,  
PLATED WITH TIN.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.

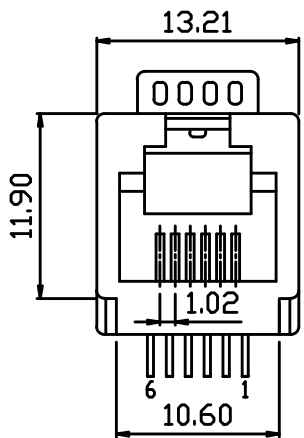

**NOTE:**

1. A AND B HIGHEST POINT  
MUST OVER C FLAT SURFACE.
2. THE MAXIMUM DISTANCE (0.15m/m)  
BETWEEN LOWEST AND HIGHEST  
ON A AND B FLAT SURFACE.

DO NOT SCALE DRAWING	TOLERANCES UNLESS OTHERWISE NOTED	INCH	MM	DR. <i>S.J.CHENG</i>	DATE AUG-02 '06	<i>XMULTIPLE</i>	
THIRD ANGLE PROJECTION	LINEAR $\frac{\text{MM}}{\text{INCH}}$	00 ± .01 000 ± .005 0000 ± .002	0.0 ± 0.25 0.00 ± 0.13 0.000 ± 0.05	CK'D <i>M.CHANG</i>	AUG-02 '06		
MM INCH	ANGLE ± 0° 30'	RADII	+ 0.40 - 0.15	APP'D <i>W.J.YANG</i>	AUG-02 '06	SCALE SIZE DWG.NO. XMK-9738-6613-LFG-IM-T01	REV. SHEET 5 1