


1. MATERIALS:
 - 1.1 HOUSING: PBT, UL94V-0
HOUSING COLOR: BLACK.
 - 1.2 CONTACT: PHOSPHOR BRONZE, SELECTIVE GOLD (SEE ORDER INFORMATION)
PLATED IN CONTACT AREA, GOLD FLASH PLATED IN SOLDER AREA, 30u" MIN. NICKEL UNDERPLATED OVERALL.
2. SPECIFICATIONS:
 - 2.1 VOLTAGE RATING: 125 VAC R.M.S.
 - 2.2 CURRENT RATING: 1.5AMP
 - 2.3 CONTACT RESISTANCE: 40mΩ Max.
 - 2.4 INSULATION RESISTANCE: 500MΩ MIN @ 500VDC.
 - 2.5 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC PER MINUTE.
 - 2.6 OPERATING TEMPERATURE: -40°C ~ +85°C
 - 2.7 250 CYCLES MATING MINIMUM.

3. NOTES:
 - 3.1 THIS COMPONENT AND ITS HOMOGENEOUS SUBCOMPONENTS ARE ROHS COMPLIANT.
 - 3.2 TIA-1096 COMPLIANT.
4. ORDER INFORMATION:

XMK-RJ006 X OP8 SX -A11-RS1-T01

PIN NUMBER:	CONTACT PLATED:
0: 4C	S1: 1u" GOLD S5: 15u" GOLD
1: 6C	S2: 3u" GOLD S6: 30u" GOLD
3: 2C	S3: 5u" GOLD S9: 50u" GOLD
	S4: 10u" GOLD

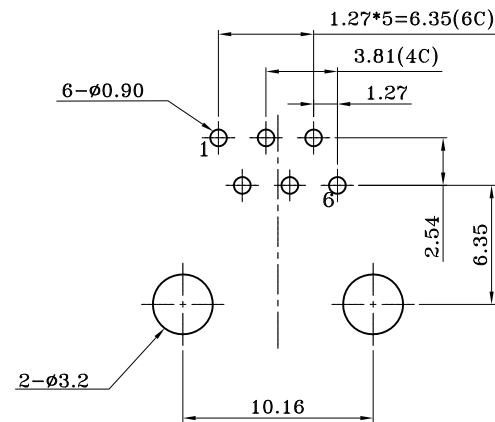


RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE ±0.05)

5

					TOLERANCES: DIM. X.X=±0.3 X.XX=±0.25 UNIT: mm GENERAL ANGLE: ±3°
A	NEW RELEASE		Lidar	Jun.17.2008	
REV.	DESCRIPTION	ECN	DRAWN	DATE	

REVISIONS



TITLE: RJ11 JACK CONNECTOR R/A TYPE			
DRAWN:	Lidar	DWG NO.:	RJ006XOP8SX -A11-RS1
CHECKED:	Brant	PART NO.:	XMK-RJ006XOP8SX -A11-RS1-T01
APPROVAL:	Regan	SCALE:	none
		SHEET:	1 OF 1
		LAYER:	CN019

XMULTIPLE

RFQ NO.: