



RoHS Compliance



NOTE:

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

- MATERIAL:
HOUSING: PBT, WITH GLASS FIBER,
UL 94V-0, STANDARD COLOR-BLACK.
CONTACTS: PHOSPHOR BRONZE.
- FINISH:
CONTACTS: 1.27μm [50μ"] MIN. GOLD PLATED ON ENTIRE CONTACT,
1.27μm [50μ"] MIN. NICKEL UNDERPLATED
ALL OVER.
- "▽" SHOWS QIP INSPECTION POINT.

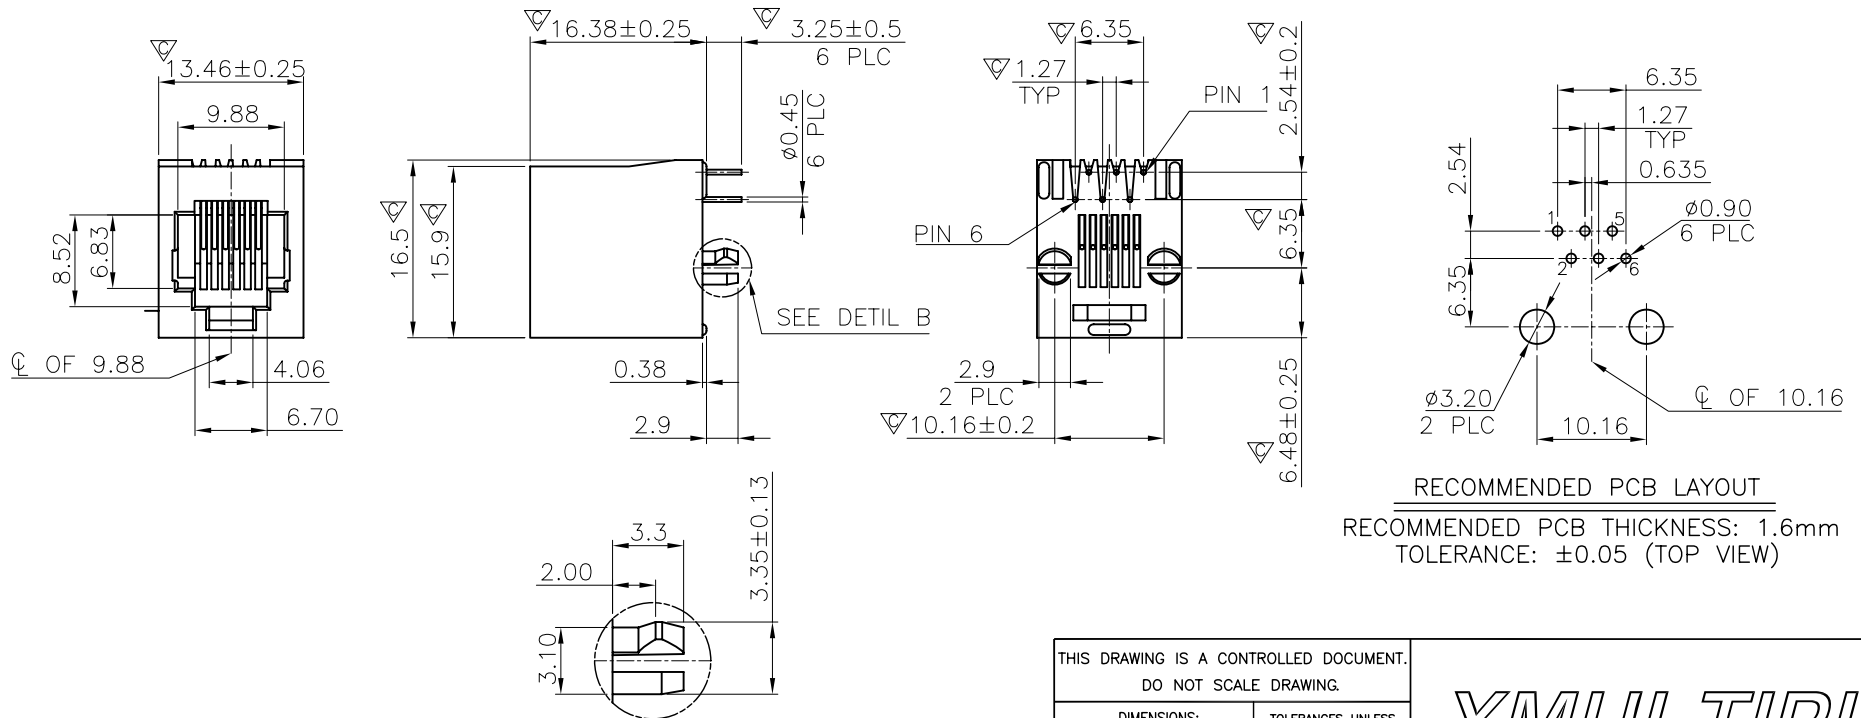

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ±0.05 (TOP VIEW)

DETAIL B
(SCALE 2:1)

THIS DRAWING IS A CONTROLLED DOCUMENT. DO NOT SCALE DRAWING.	
DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1 PLC ± 0.25 2 PLC ± 0.13 3 PLC ± 0.05 ANGLES ± -
THIRD ANGLE PROJECTION	
MATERIAL SEE NOTES	FINISH SEE NOTES
DWN <i>CIAN.CILUO</i>	DATE MAY-25-2010
CHK <i>M.CHANG</i>	MAY-25-2010
APVD <i>W.J.YANG</i>	MAY-25-2010

XMULTIPLE

TITLE
6POSITION, 180°, SPLIT PEGS,
TOP ENTRY PCB JACK

LTR	DESCRIPTION	DATE	APVD
REVISIONS			

SIZE A3	CAUSE CODE -	DRAWING NO XMV-9607-6613-B
WEIGHT -	GRAMS Ref.	REV 3 SHEET 1