


DETAIL X

MATERIAL:

- HOUSING—PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR—BLACK
- CONTACTS—0.35mm THICK PHOS-BRONZE PLATED 50U" WITH HARD GOLD AND GOLD FLASH ON SOLDER AREA.
- SHIELD—0.25mm THICK COPPER ALLOY, PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.

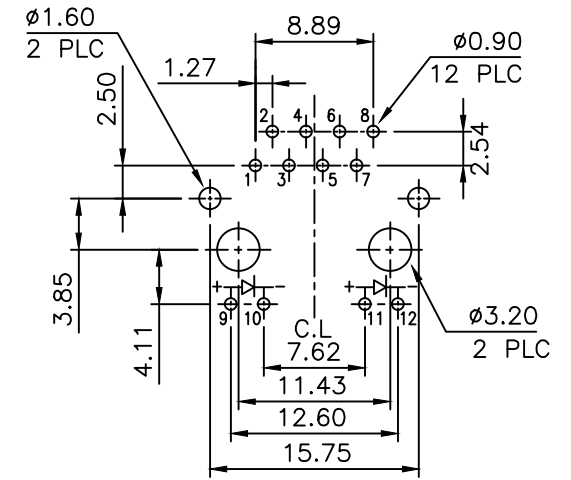

PCB Layout

Ref.

DO NOT SCALE DRAWING

TOLERANCES UNLESS OTHERWISE NOTED


INCH

MM

DR. *M.L.HUANG*

DATE AUG-01 '06

XMULTIPLE



THIRD ANGLE PROJECTION

LINEAR $\frac{\text{MM}}{\text{INCH}}$

00 ± .01
000 ± .005
0000 ± .002

0.0 ± 0.25
0.00 ± 0.13
0.000 ± 0.05

CK'D
M.CHANG

AUG-01 '06

TITLE RJ45, WITH LED'S, SHIELDED FLAT PIN, TOP ENTRY PCB JACK

MM
INCH

ANGLE ± 0° 30'

RADII

± 0.40
- 0.15

APP'D
W.J.YANG

AUG-02 '06

SCALE SIZE DWG.NO.
XMV-9644-8813-SOL1-D

REV. SHEET
9 1