


**DETAIL X**

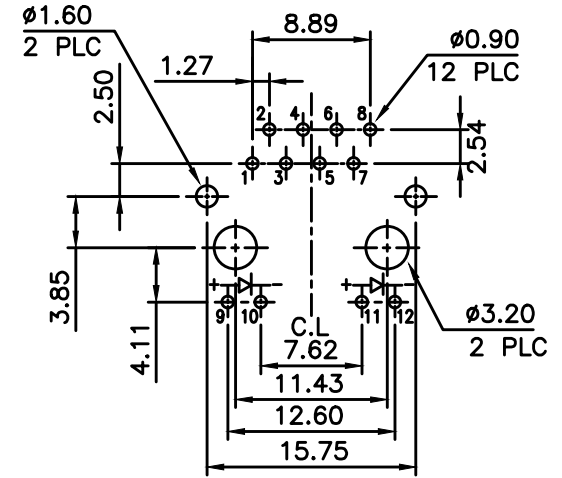

**PCB Layout**

Ref.

**MATERIAL:**

- HOUSING—PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR—BLACK
- CONTACTS—0.35mm THICK PHOS-BRONZE PLATED 6U" WITH HARD GOLD AND GOLD FLASH ON SOLDER AREA.
- SHIELD—0.25mm THICK COPPER ALLOY, PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.

DO NOT SCALE DRAWING

TOLERANCES UNLESS OTHERWISE NOTED


INCH

MM

DR. **M.L.HUANG**

DATE AUG-01 '06

**XMULTIPLE**



THIRD ANGLE PROJECTION

LINEAR  $\frac{\text{MM}}{\text{INCH}}$

00 ± .01  
000 ± .005  
0000 ± .002

0.0 ± 0.25  
0.00 ± 0.13  
0.000 ± 0.05

CK'D  
**M.CHANG**

AUG-01 '06

TITLE RJ45, WITH LED'S, SHIELDED FLAT PIN, TOP ENTRY PCB JACK

MM  
INCH

ANGLE ± 0° 30'

RADII

± 0.40  
- 0.15

APP'D  
**W.J.YANG**

AUG-02 '06

SCALE SIZE DWG.NO.  
XMV-9644-8814-SOL1-D-ZZ1

REV. SHEET  
9 1