
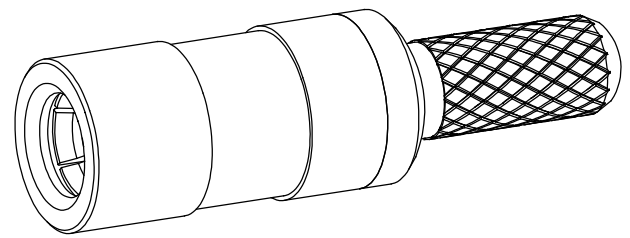


Drawing for Package

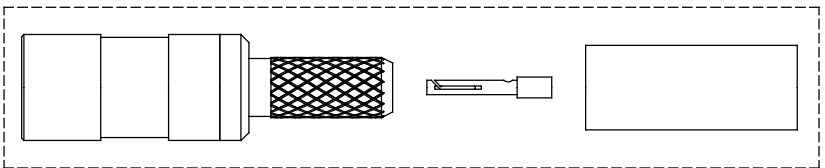

(RoHS Compliant)
Pb ≤ 4 wt%
Cd ≤ 75 ppm

6	FERRULE	BRASS	1	GOLD	3.8x3.2x9.5金	C2700
5	BODY	BRASS	1	GOLD	TC-2402J-1	C3604
4	CENTER PIN	BeCu	1	GOLD (3u ^r)	TC-2402J-2-3u	C1730
3	INSULATOR	TEFLON	1	-	TC-2402J-3	ASTM D1710
2	INNER CONTACT	BeCu	1	GOLD	TC-2402J-10	C1730
7	SHELL	BRASS	1	GOLD	TC-2402J-8	C3604
NO	DESCRIPTION	MATERIAL	QTY	FINISH	ITEM #	CODE #

DIMENSIONS(mm)	TOLERANCE	DRAWING	DESCRIPTION
0-5mm	±0.05	DESIGNED	SSMB Plug Crimp for RG174
5-10mm	±0.1	CHECKER	
10-15mm	±0.2	APPROVED	
15-20mm	±0.3		
20mm ABOVE	±0.4	UNIT: M/M	SCALE 8:1
		DATE	2013.08.01

PRODUCT NUMBER	VERSION
XRF-2402J-TBGG/1/	A00
Xmultiple Technologies, Inc. ISO 9001-2008	