


MOUNTING HOLE

(RoHS Compliant)
Pb ≤ 4 wt%
Cd ≤ 75 ppm

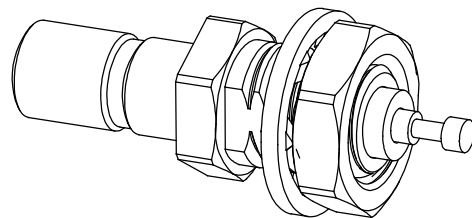

| NO | DESCRIPTION | MATERIAL | QTY | FINISH | ITEM # | CODE # |
|----|--------------|-------------|-----|-------------------------|--------------|------------|
| 5 | NUT | BRASS | 1 | GOLD | TC-2404J-5金 | C3604 |
| 4 | TOOTH WASHER | BRASS | 1 | GOLD | TC-2404J-4金 | C3604 |
| 3 | CENTER PIN | P.H. Bronze | 1 | GOLD (3u ²) | TC-2406-2-3u | C5441 |
| 2 | INSULATOR | TEFLON | 1 | - | TC-2406-3 | ASTM D1710 |
| 1 | BODY | BRASS | 1 | GOLD | TC-2406-1 | C3604 |

| DIMENSIONS(mm) | TOLERANCE | DRAWING | DESCRIPTION |
|----------------|-----------|------------|------------------------------------|
| 0-5mm | ±0.05 | DESIGNED | SSMB Jack B/H Front Panel Mount |
| 5-10mm | ±0.1 | CHECKER | |
| 10-15mm | ±0.2 | APPROVED | |
| 15-20mm | ±0.3 | UNIT: M/M | |
| 20mm ABOVE | ±0.4 | SCALE 10:1 | |

| PRODUCT NUMBER | | VERSION |
|--|--|---------|
| XRF-2406-TBGG/1/ | | A00 |
| Xmultiple Technologies, Inc. ISO 9001-2008 | | |