
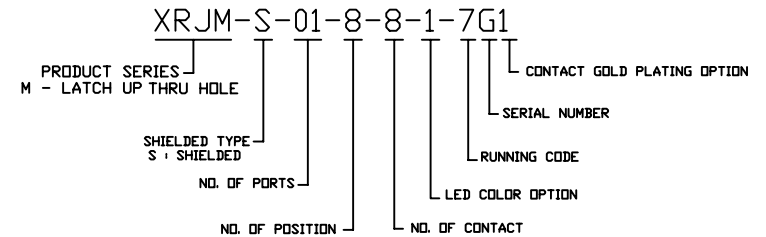



NOTES:

- MATERIALS:
HOUSING: HIGH TEMP. THERMOPLASTIC, PBT, BLACK, UL 94V-0
CONTACTS: T=0.35 mm PHOSPHOR BORNZE, 50u" NICKEL UNDERPLATE ON ALL AREA, 100u" TIN ON TERMINATION END, 15u" GOLD ON CONTACT AREA.
SHIELD: BRASS, NICKEL PLATED .
- OPERATING TEMPERATURE: -40°C ~ +85°C
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

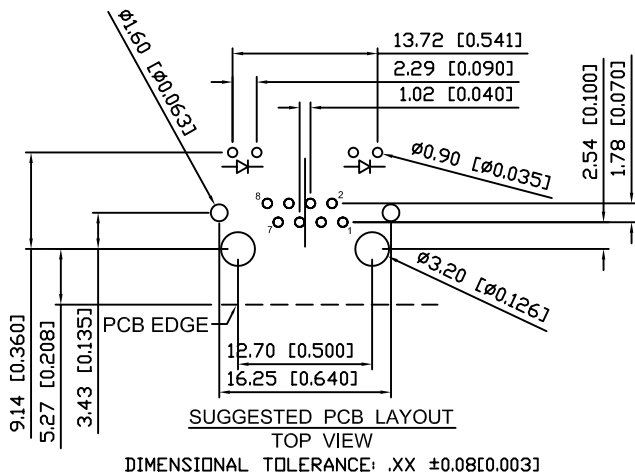

RoHS Compliant

X MULTIPLE		THE INFORMATION AGE	
XMULTIPLE ASIA 4F, No. 347, Yang Guang St., Neihu, Taipei, Taiwan 11475		XMULTIPLE USA 1420 Los Angeles Ave., Suite G, Simi Valley, CA 93065	
THIS DRAWING IS A CONTROLLED DOCUMENT.		G/NO: 81	
TITLE: RJ45 Connectors, W/LED, 8P,8C, Shielded, Thru-Hole,		DWG NO: XRJM-S-01-8-8-1-7G1	
PART NO: XRJM-S-01-8-8-1-7G1		DRAWN: LEON	
		CHKD: JEFF	
		DATE: Jun.13,07	
UNIT mm[inch]	SHEET 1 of 1	REV 01	