

**SPECIFICATIONS:**

Material:

Insulator: Glass-Reinforced Thermoplastic, UL 94V-0,  
Color: Black  
Contacts: Phosphor Bronze

Plating:




Contact area: 15" gold plating  
Solder tails: 3u" gold flash over 50 u" nickel plate.

Electrical:

Voltage Rating: 120 VAC max.  
Current rating: 0.5 Amp.  
Contact resistance: 35 milliohms max.  
Insulation resistance: 500 Mohms min.  
Dielectric withstanding voltage: 300 VAC/minimum.

Environmental:

Operating temperature: -55° to +85°

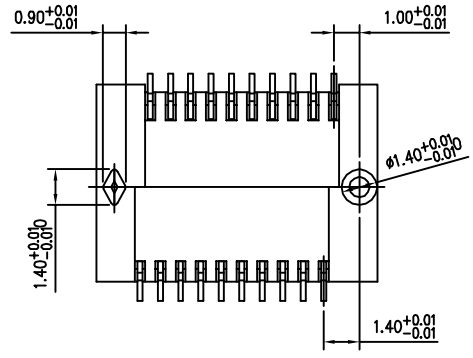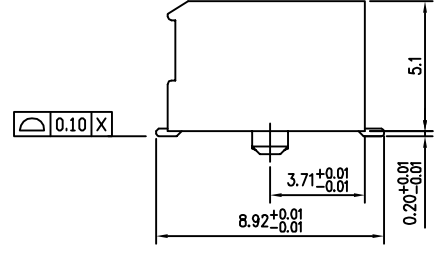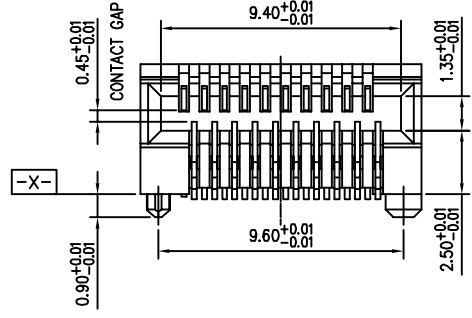

Xmultiple Technology Inc.					
TOLERANCES	TITLE	SMT CONNECTOR 0.80 MM CENTER 20 POSITIONS			
X.X ±0.3 X.XX ±0.2 X.XXX ±0.1 Angle ±5°	DRAWN BY	CHECKED BY	APPROVED BY		
	<i>Angela</i>	<i>Paise</i>	<i>Benson</i>		
13001	UNIT	SCALE	SIZE	DRAW NO.	REV.
	MM	NONE	A4	XA130A01	A