


REV.	ECN NO.	DATE
A	Released	09/07/2011
B	0908/11	09/08/2011

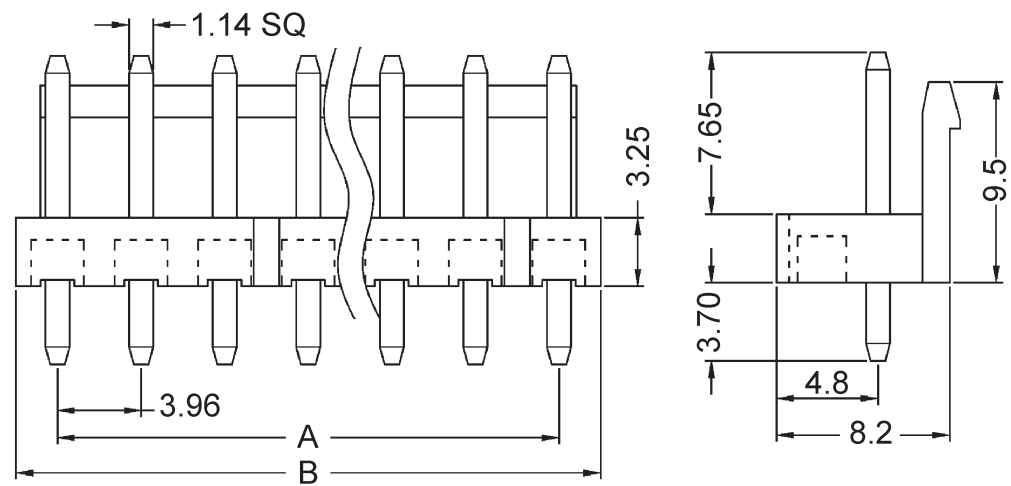


Specifications:

Materials:

- * Contact: Brass
- * Housing: Nylon PA66 (UL94V-0), White
- * Plating: Tin plating

Electrical:

- * Contact Resistance: 10mΩ Max
- * Insulator Resistance: 1000MΩ Min.
- * Current Rating: 5A max. AC/DC
- * Voltage rating: 250V DC/AC
- * Withstanding Voltage: 1500V AC for 1 minute



PCB Layout

How to Order:

XTB - WH3002 - WS - x - B - LA1
 Pin No.
 2 ~ 15

CIRCUITS	Dim A	Dim B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.58
14	51.48	55.54
15	55.44	59.40

RoHS Compliant

Scale		Drawn by	ANGLIA	XMULTIPLE
Unit	mm	Checked by	Kevin	
Tolerance		Sheet	1 of 1	
.X	± 0.30	Projection		Name: Crimp Style Connector 3.96mm pitch, Wafer
.XX	± 0.20			
.XXX	± 0.10			
ANG.	= 2°			
Part number		XTB-WH3002-WS-x-B-LA1		
Drawing no.		WH3002-WS-x-B(a)		