


HSF


NOTES:
 Current Rating:0.5A
 Voltage Rating:50V AC/DC
 Contact Resistance:50milliohm Max
 Insulation Resistance:100Megohm Min
 Operation Temperature:-20°Cto+105°C

Housing Material:PA9T(UL94V-0)
 Cap Material:LCP(UL94V-0)
 Contact Material:Phosphor Bronze
 Contact plating:Au or Sn over Ni

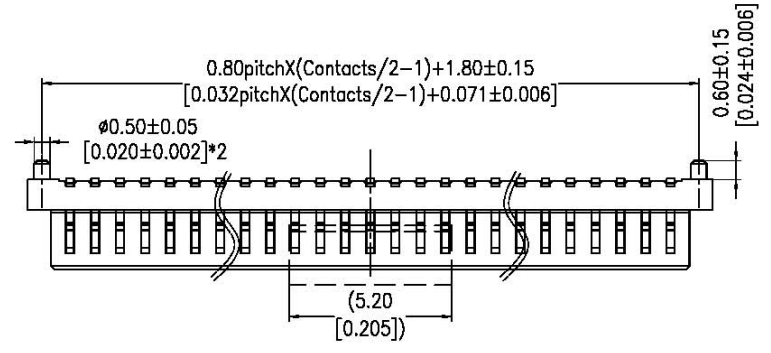

Recommended P. C. B Layout (Top Side)

(PCB BOARD TOLERANCE ± 0.05)

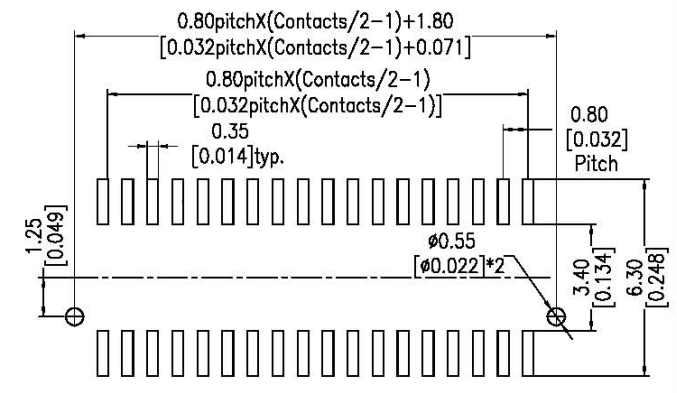




Ordering Information

XTB3610-P XXX - XXX XX R 01

No. of Pins Housing High Contact Plating
 T=Tube F=Tube+CAP
 P=Tube+CAP R=Tap&Reel+CAP

G1=3u"Gold
 G2=5u"Gold
 S1=3u"Gold/Tin
 S2=5u"Gold/Tin

ASS'Y HIGH(H)	PLUG(H1)	SOCKET(H2)
4.00	1.00	3.00
4.50	1.50	3.00
5.00	2.00	3.00
5.50	1.50	4.00
6.00	2.00	4.00
6.50	2.00	4.50
7.00	3.00	4.00
7.50	3.00	4.50
8.00	4.00	4.00

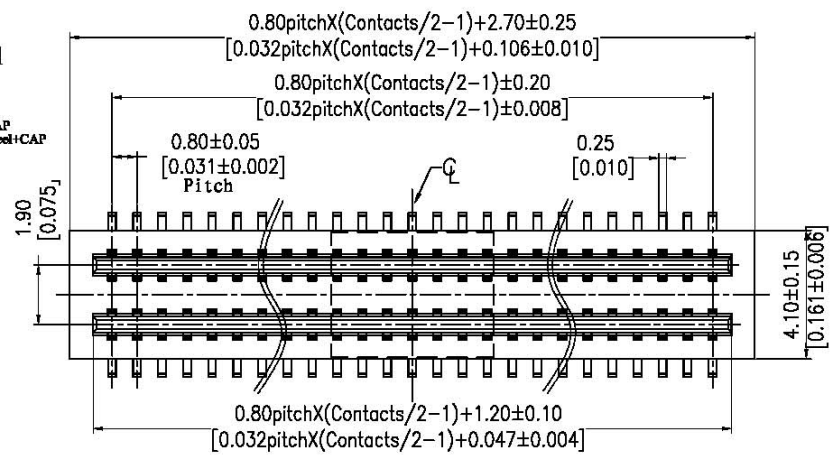

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	Xmultiple Technologies, Inc.
A0	2012/11/02	NEW		X.X ±0.40	Tsingsn	2012/11/02	UNIT	mm	XTB3610-PXXX-XXXXR01	
				X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:	
				X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	0.80mm B TO B MALE 180° SMT TYPE	
				Angle ± 3°			PROJ.	◆	Customer NO.	