



HSF

NOTES:
 Current Rating:0.5A
 Voltage Rating:50V AC/DC
 Contact Resistance:50milliohm Max
 Insulation Resistance:100Megohm Min
 Operation Temperature:-20°Cto+105°C

Housing Material:PA9T(UL94V-0)
 Cap Material:LCP(UL94V-0)
 Contact Material:Phosphor Bronze
 Contact plating:Au or Sn over Ni

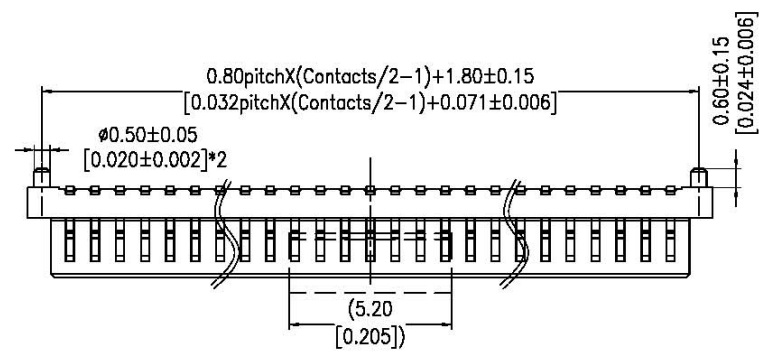

Recommended P. C. B Layout (Top Side) (PCB BOARD TOLERANCE ± 0.05)


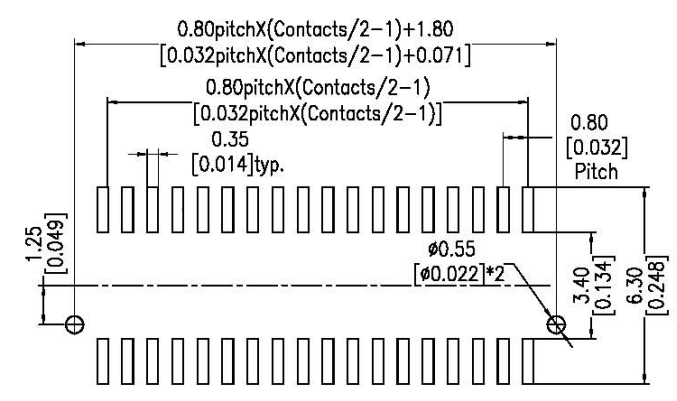


Ordering Information

XTB3610-P XXX - XXX XX R 01

No. of Pins Housing High Contact Plating
 T=Tube F=Tube+CAP R=Tap&Reel+CAP
 G1=3u"Gold G2=5u"Gold S1=3u"Gold/Tin S2=5u"Gold/Tin

ASS'Y HIGH(H)	PLUG(H1)	SOCKET(H2)
4.00	1.00	3.00
4.50	1.50	3.00
5.00	2.00	3.00
5.50	1.50	4.00
6.00	2.00	4.00
6.50	2.00	4.50
7.00	3.00	4.00
7.50	3.00	4.50
8.00	4.00	4.00

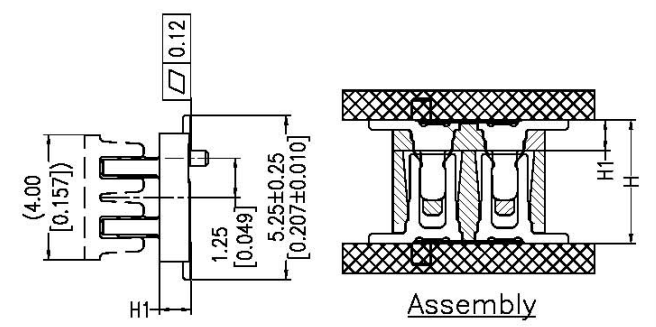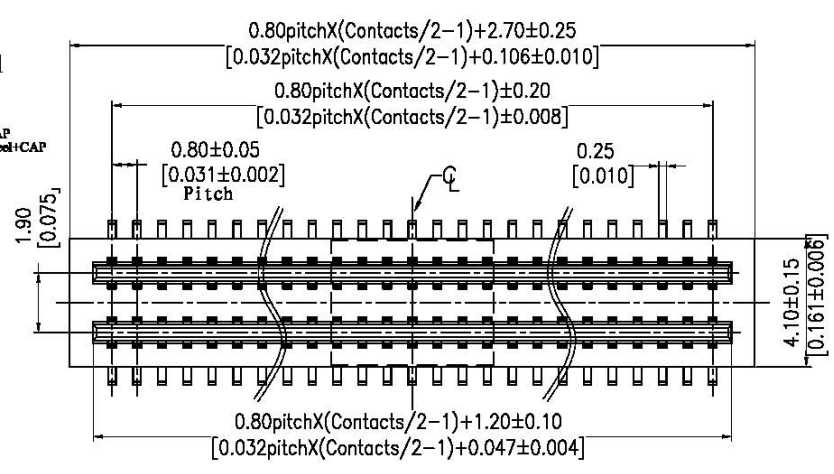

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.
				Angle	TOL							
A0	2012/11/02	NEW		X.X	±0.40	CHECK	2012/11/02		A4	XTB3610-PXXX-XXXXXR01	0.80mm B TO B MALE 180° SMT TYPE	
				X.XX	±0.25							
				X.XXX	±0.15							
					± 3'	APPROVE						

Xmultiple Technologies, Inc.