






HSF

NOTES:

Current Rating:0.5A
 Voltage Rating:50V AC/DC
 Contact Resistance:50milliohm Max
 Insulation Resistance:100Megohm Min
 Operation Temperature:-20°Cto+105°C

Housing Material:PA9T+30%G.F(UL94V-0)
 Contact Material:Phosphor Bronze
 Contact plating:Au or Sn over Ni

Recommended P. C. B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

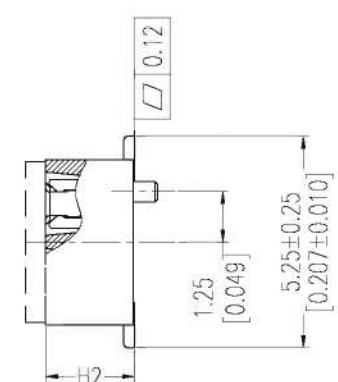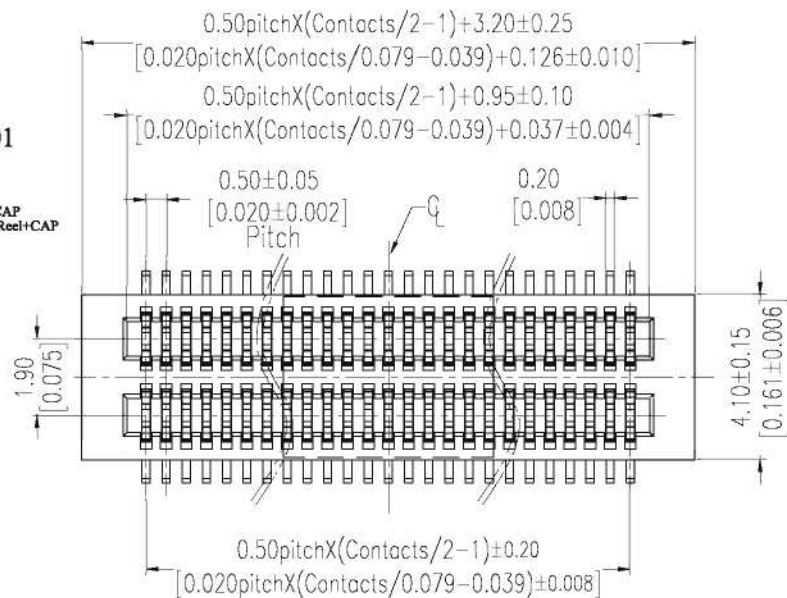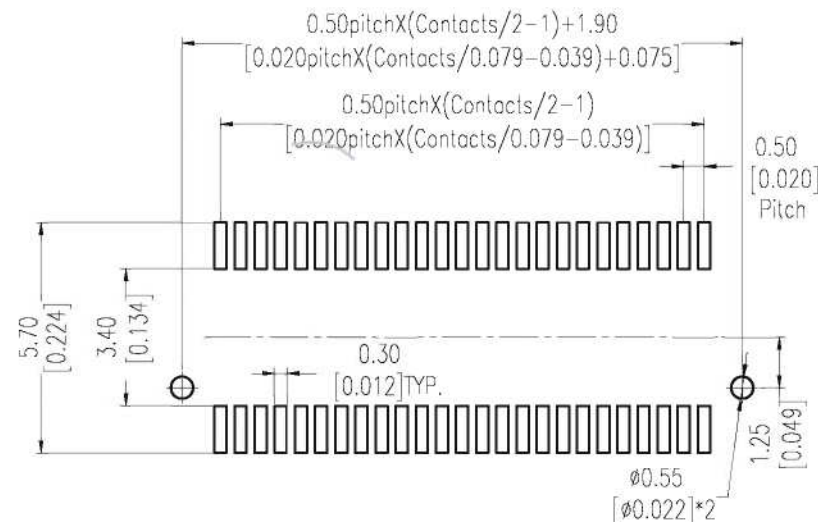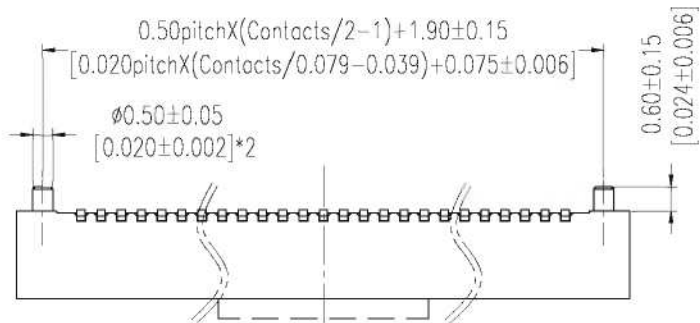

Ordering Information

XTB3620-S XXX - XXX XX R 01

No. of Pins Housing High Contact Plating T=Tube
 G1=3u"Gold P=Tube+CAP
 G2=5u"Gold R=Tape&Reel+CAP
 S1=3u"Gold/Tin S2=5u"Gold/Tin

ASS'Y HIGH(H)	PLUG(H1)	SOCKET(H2)
3.00	0.80	2.20
3.50	0.80	2.70
4.00	1.00	3.00
4.50	1.50	3.00
5.00	2.00	3.00
5.50	1.50	4.00
6.00	2.00	4.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.
				X.X	±0.40							
A0	2012/06/27	NEW		X.XX	±0.25	CHECK	DATE	SIZE	A4		FEMALE 180° SMT TYPE	
				X.XXX	±0.15	APPROVE	DATE	SHEET	1/1			
				Angle	± 3°			PROJ.				
				DIM	TOL							

Xmultiple Technologies, Inc.