




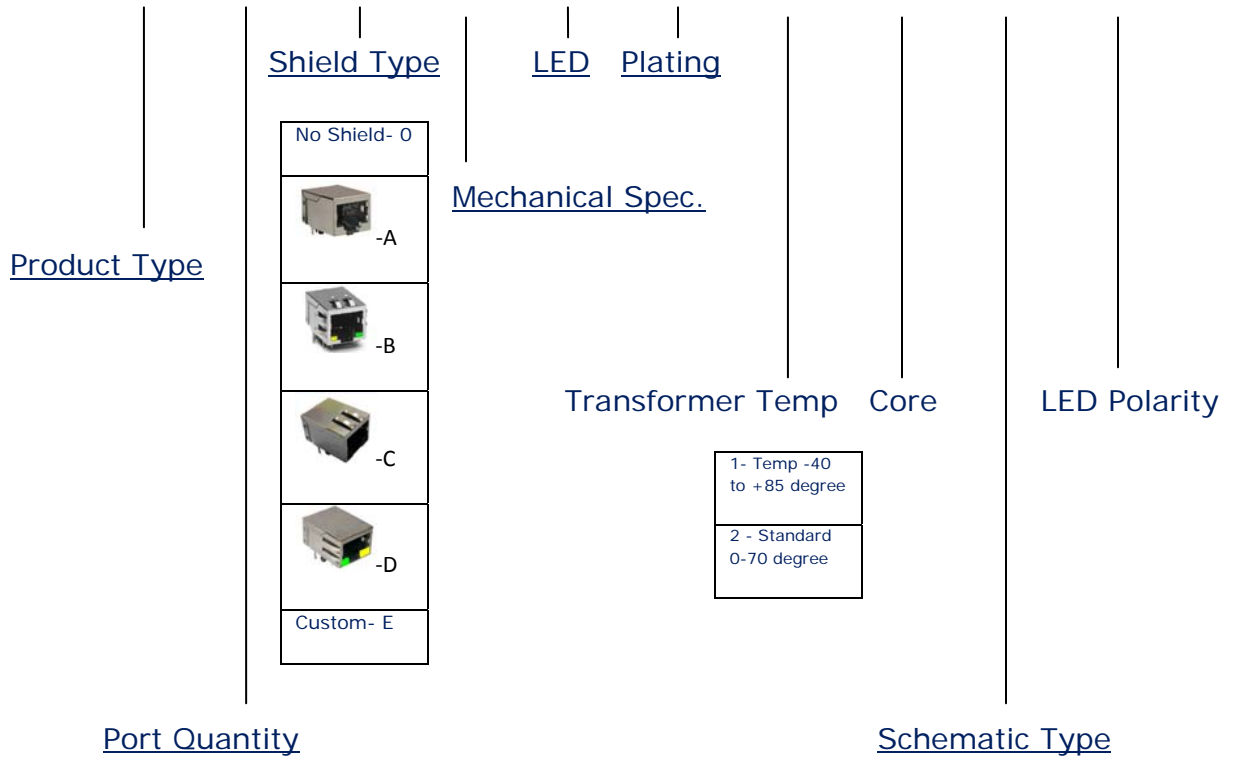

XMG PoE Series

Part Numbering XMG-P Series

XMG - P - X - X - X - X - X - X - X - X - X



- No Shield- 0
-  -A
-  -B
-  -C
-  -D
- Custom- E

- 1- Temp -40 to +85 degree
- 2 - Standard 0-70 degree

| Single PORT | | Multiple PORT | |
|-------------|-----|---------------|-----|
| 1 | 1*1 | A: | 2*1 |
| 2 | 1*2 | B: | 2*2 |
| 3 | 1*3 | C: | 2*3 |
| 4 | 1*4 | D: | 2*4 |
| 5 | 1*5 | E: | 2*5 |
| 6 | 1*6 | F: | 2*6 |
| 7 | | G: | 2*7 |
| 8 | 1*8 | H: | 2*8 |

Notes: Plating Area
 0: Fμ 1: 6μ 2: 15μ 3: 30μ 5: 50μ 6: 3μ