


SPECIFICATION FOR APPROVAL

Customer:
 Customer P/N:
 Meisongbei P/N: MSRH125-100M
 Date: 2011-3-31




A Dimensions: Unit(mm)

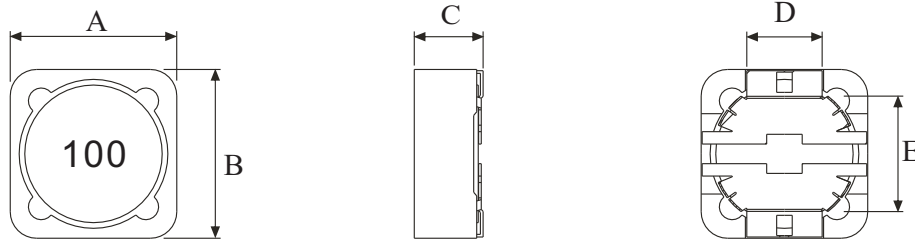


Part NO	A	B	C	D	E
MSRH125-100M	12.0 ± 0.3	12.0 ± 0.3	6.0 Max	5.0 ± 0.2	7.6 ± 0.3

B Soldering: Unit(mm)



C Schematic:



D Electrical Character

Part Number	Inductance	DCR	IDC	Test Conditions
	L(μH)	Ω	A	
MSRH125-100M	10±20%	0.025 max	4.0 max	1 KHz/0.25V

E Test equipment:

1. L: HP4274A Tested at 1KHz, 0.25Vrms
2. DCR: AX-111
3. Electrical specifications at: 20°C

F General Specifications:

1. Storage temp range: -40°C to +125°C
2. Operating temp range: -40°C to +85°C

Approved By	Poal	Checked By	Alan
-------------	------	------------	------


SPECIFICATION FOR APPROVAL

Customer:
 Customer P/N:
 Meisongbei P/N: MSRH125-100M
 Date: 2011-3-31




G Packaging Information

(1) Configuration and Dimensions(mm)

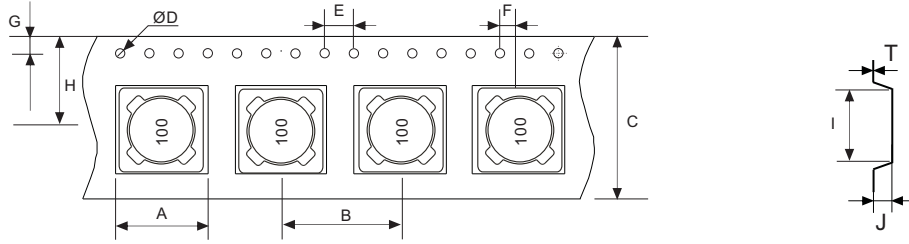


A	B	C	D	E	F	G	H	I	J	T
12.7 ± 0.1	16.0 ± 0.1	24.0 ± 0.2	1.50 ± 0.1	4.00 ± 0.1	2.00 ± 0.1	1.75 ± 0.1	11.5 ± 0.1	12.7 ± 0.1	6.20 ± 0.1	0.40 ± 0.05

(2) Feeding direction

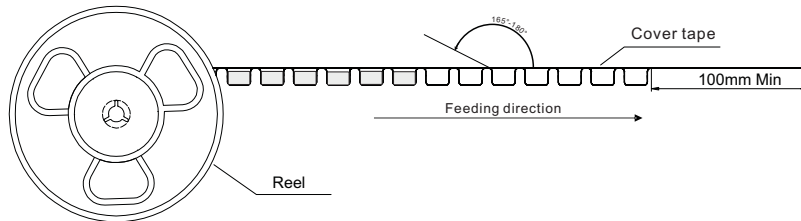

(3) Packaging quantities

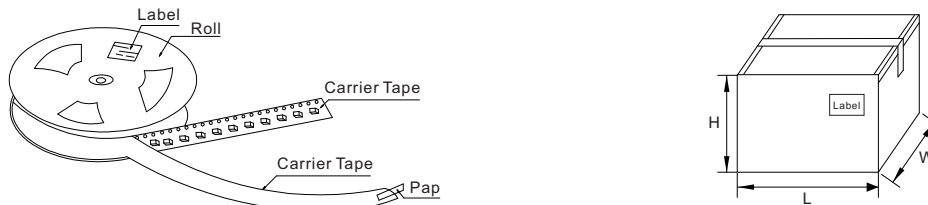

Type	Inner: Reel	Outer: Carton	
	Q'ty (pcs)	Q'ty (pcs)	Size(L*W*H)
MSRH125-100M	500 pcs	3500 pcs	360x360x210 (mm)

Approved By	Poal	Checked By	Alan
-------------	------	------------	------