


3L P/N : SMTTC50-601U:601U-3.6A

YOUR REF.:

1.MECHANICAL DIMENSIONS (外形尺寸): DRAW NO.: SMTTC50-XTX2

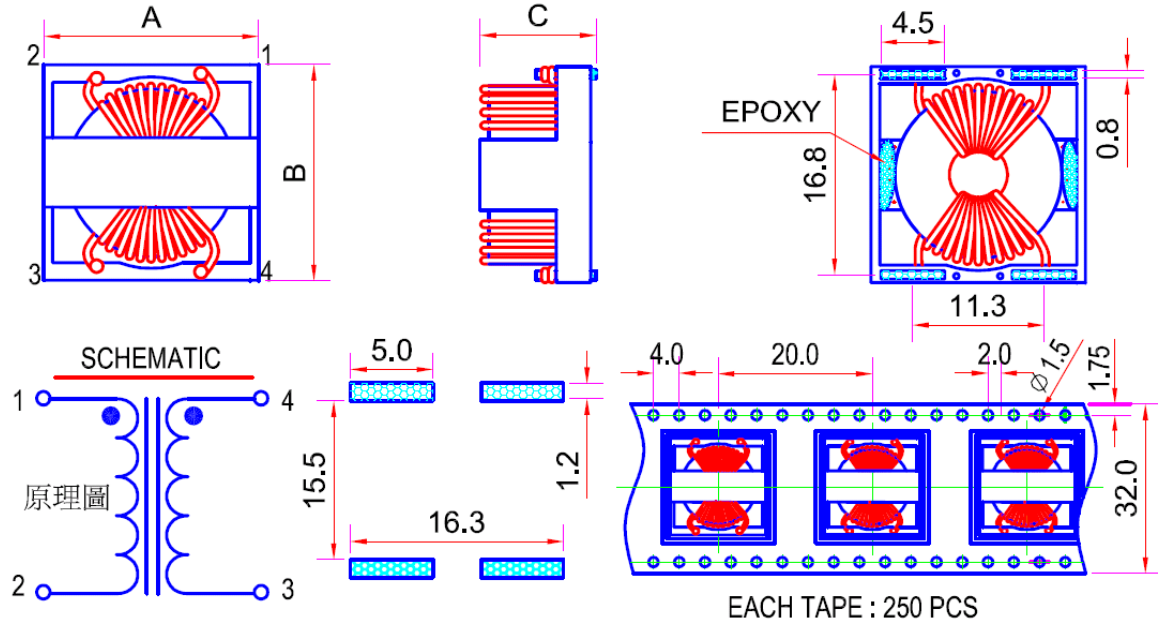

| Item項目 | Spec.(規格mm) | Typ.(參考值) | Item項目 | Spec.(規格mm) | Typ.(參考值) |
|--------|-------------|-----------|--------|-------------|-----------|
| A | 17.8 MAX | 17.56 | F | | |
| B | 19.8 MAX | 19.06 | G | | |
| C | 9.8 MAX | 9.51 | H | | |
| D | | | I | | |
| E | | | J | | |

2. NOTES (備注, 包括印字及起始同相端等特別要求):

2.1 Marking (印字): ""

| | | | |
|--------------------------|--------------|-------------|-----------|
| CUSTOMER APPROVED (客戶確認) | APPROVED(確認) | CHECKED(檢查) | DRAWN(制圖) |
| | | | |

3L P/N : SMTTC50-601U:601U-3.6A

YOUR REF.:

3. ELECTRICAL CHARACTERISTICS (電特性要求) :

| Item (項目) | Specifications (規格) | Typ.(參考值) | Test equipments (測試設備) : |
|------------|---------------------|-----------|--------------------------------------|
| L1=L2 | 0.6mH MIN | 0.86mH | HP4284A PRECISION LCR METER |
| Test Freq. | @100kHz 0.10V | | HP4284A PRECISION LCR METER |
| DCR1=DCR2 | 50mOHM MAX | 19.4mOHM | CHENHWA 502 OHM METER |
| SRF | 4 MHz Ref. | 3.22MHz | AGILENT E4991A RF IMPEDANCE ANALYZER |
| R.Current | 3.6A MAX | | HP4284A WITH HP42841A CURRENT SOURCE |
| Turns | 13Ts:13Ts Ref. | | |
| Ope.Temp. | -30°C TO +105°C | | HC-D3M TEMP. & HUMIDITY CHAMBER |

ELECTRICAL NOTES (電特性備注欄) :

| APPROVED(確認) | CHECKED(檢查) | DRAWN(制圖) |
|--|---|---|
|  |  |  |