

## 50/60HZ PCB MOUNT TRANSFORMERS – EE RANGE

# 0.35W EE20-6.1 FAPE20 SERIES

### FEATURES:


- It is miniaturised to be easily PCB mounted.
- It has very high insulation of 4000Vrms HI-pot.
- It accords with UL94V-0 flammability requirements.
- Heat-resistance reaches 130°C

### ELECTRICAL CHARACTERISTICS (@ 25°C)

Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.	Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.
FAPE200601	230	6 / 58.0	10.80	1	FAPE200613	115	6 / 58.0	10.80	1
FAPE200602	230	9 / 39.0	16.50	1	FAPE200614	115	9 / 39.0	16.50	1
FAPE200603	230	12 / 29.0	21.90	1	FAPE200615	115	12 / 29.0	21.90	1
FAPE200604	230	15 / 23.0	27.00	1	FAPE200616	115	15 / 23.0	27.00	1
FAPE200605	230	18 / 19.0	31.50	1	FAPE200617	115	18 / 19.0	31.50	1
FAPE200606	230	24 / 14.0	41.70	1	FAPE200618	115	24 / 14.0	41.70	1
FAPE200607	230	2 x 6 / 29.0	2 x 10.95	2	FAPE200619	115	2 x 6 / 29.0	2 x 10.95	2
FAPE200608	230	2 x 9 / 19.0	2 x 15.60	2	FAPE200620	115	2 x 9 / 19.0	2 x 15.60	2
FAPE200609	230	2 x 12 / 14.0	2 x 20.70	2	FAPE200621	115	2 x 12 / 14.0	2 x 20.70	2
FAPE200610	230	2 x 15 / 12.0	2 x 26.00	2	FAPE200622	115	2 x 15 / 12.0	2 x 26.00	2
FAPE200611	230	2 x 18 / 9.5	2 x 31.20	2	FAPE200623	115	2 x 18 / 9.5	2 x 31.20	2
FAPE200612	230	2 x 24 / 7.0	2 x 41.90	2	FAPE200624	115	2 x 24 / 7.0	2 x 41.90	2

- Frequency 50/60Hz
- Potted under vacuum
- Split-bobbin
- Temperature class to 70°C/B
- Short-circuit-proof
- weight: 0.024kg

### PHYSICAL CHARACTERISTICS

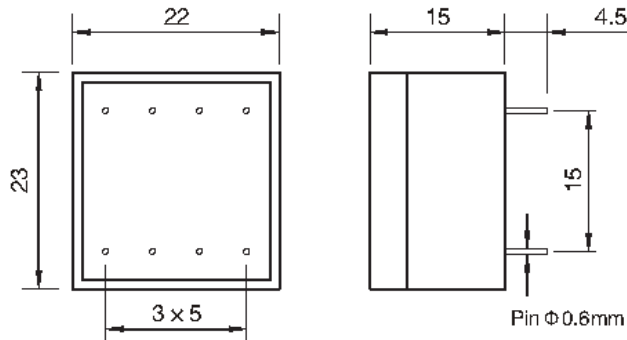

All dimensions in mm

### TECHNICAL INFORMATION

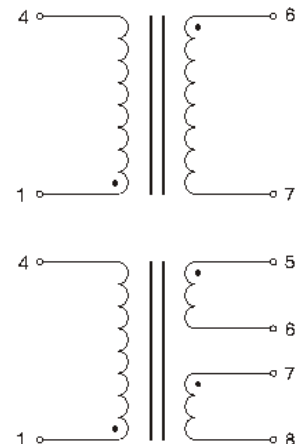


Fig 1

Fig 2