
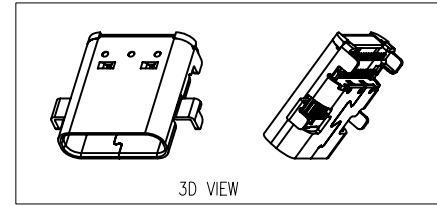
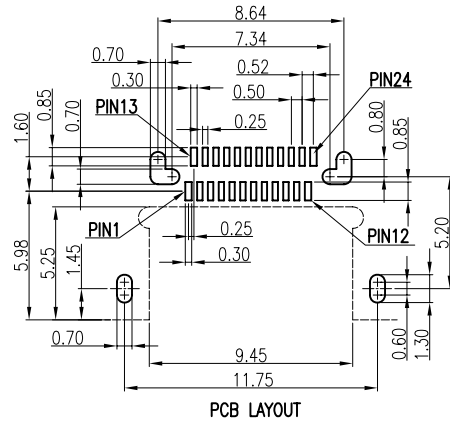



REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0		NEW DWG.	Jason.sun			2014-11-03



- NOTES:
- MECHANICAL:
 - INSERTION: 5~20N.
 - EXTRACTION: 8~20N.
 - DURABILITY: 10000 CYCLES
 - ELECTRICAL:
 - CURRENT: 5A MIN FOR VBUS;
0.25A MIN FOR OTHER.
 - VOLTAGE: 5V AC
 - WITHSTANDING VOLTAGE: 100V AC.
 - CONTACT RESISTANCE: 40 mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN.
 - ENVIRONMENTAL
 - TEMPERATURE RANGE -55°C ~ +85°C




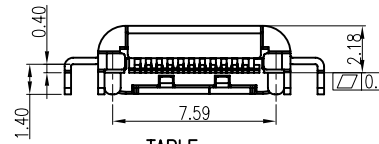


TABLE:

PRODUCT NO.	ITEM	PART NAME	Q'TY	Material
XUSB-CNG005S130R	1	MOLDING A	1	LCP 30%GF, BLACK
	2	CONTACT-LONG	12	GOLD 30u"Min. NICKEL 80u"Min.
	3	CONTACT-SHORT	12	GOLD 30u"Min. NICKEL 80u"Min.
	4	MID-PLATE	1	STAINLESS STEEL, NICKEL 50u"Min.
	5	TOP EMI PAD	1	STAINLESS STEEL, NICKEL 50u"Min.
	6	BOTTOM EMI PAD	1	STAINLESS STEEL, NICKEL 50u"Min.
	7	SHELL	1	STAINLESS STEEL, NICKEL 50u"Min.
	8	MOLDING-B	1	LCP 30%GF, BLACK

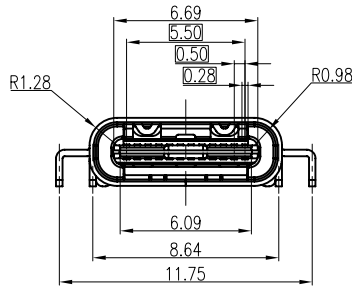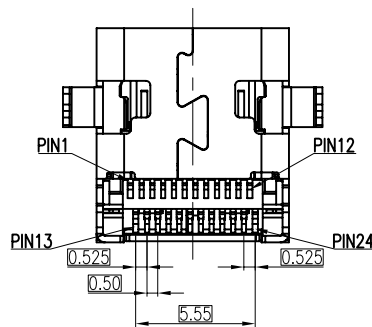

UNITS	SCALE	REV.	SHEET	Xmultiple Technologies, Inc.		
MM	1:1	A0	1 OF 1			
		DATE	TITLE		USB TYPE C 3.1 FEMALE SMT MID-MOUNT CONNECTOR	
GENERAL TOLERANCE		DR.				
0. ±0.35 0.0 ±0.35 0.00 ±0.25 0.° ±4° 0.0° ±3°		CHK.	MAT'L		FINISH	
		APPD.	SEE TABLE		SEE TABLE	
			DWG.NO.	A	PART NO.	SIZE
			DWG-USB CF-002		SEE TABLE	A4