


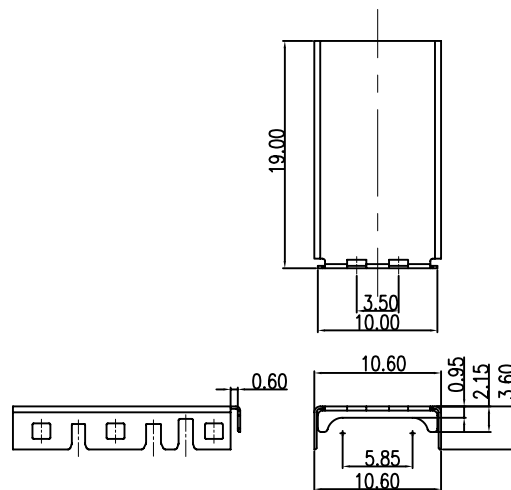





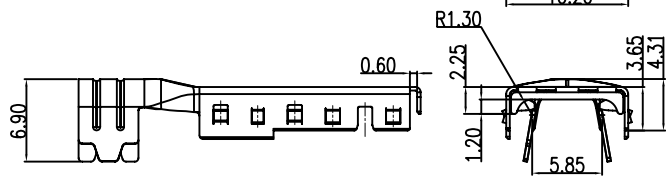


REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
A0		NEW DWG.	Qiubin			2015-01-30

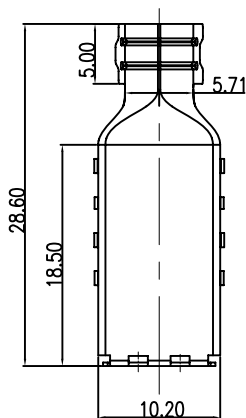

- NOTES:
- MECHANICAL:
 - INSERTION: 5~20N.
 - EXTRACTION: 8~20N.
 - DURABILITY: 10000 CYCLES
 - ELECTRICAL:
 - CURRENT: 5A MIN FOR VBUS;
 - 0.25A MIN FOR OTHER.
 - VOLTAGE: 5VAC MAX
 - WITHSTANDING VOLTAGE: 100V AC.
 - CONTACT RESISTANCE: 40 mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN.
 - ENVIRONMENTAL
 - TEMPERATURE RANGE -55°C ~ +85°C

BOTTOM SHELL



TOP SHELL

三件套料号	PRODUCT NO.	ITEM	PART NAME	Q'TY	MATERIAL
XUSB-CNHO14S030T 三件套(长体上下壳)	CNH009S030T	1	CONTACT 1	12	COPPER ALLON, GOLD 30u"Min. NICKEL 80u"Min.
		2	CONTACT 2	10	COPPER ALLON, GOLD 30u"Min. NICKEL 80u"Min.
		3	MOLDING A	1	LCP+30%GF, BLACK
		4	MOLDING B	1	STAINLESS STEEL, NICKEL 50u"Min.
		5	EMI PAD	2	STAINLESS STEEL, NICKEL 50u"Min.
		6	LATCH	1	SUS304R-1/2H, NICKEL 50u"Min.Tin100u"MIN
		7	MID-PLATE	1	STAINLESS STEEL, NICKEL 50u"Min.
		8	SHELL	1	STAINLESS STEEL, NICKEL 50u"Min.
	PS208B9470	9	TOP SHELL	1	STAINLESS STEEL, NICKEL 50u"Min.
	PS208B9460	10	BOTTOM SHELL	1	STAINLESS STEEL, NICKEL 50u"Min.

UNITS mm	SCALE 1:1	REV. A0	SHEET 1 OF 1	Xmultiple Technologies, Inc.	
		DATE 2015.01.30	TITLE USB C TYPE 3.1 Plug CONNECTOR 长体上下壳三件套		
GENERAL TOLERANCE 0. ±0.35 0.0 ±0.35 0.00 ±0.25 0.° ±4° 0.0° ±3°		DR. Qiu.Bin	CHK. Jason.sun	MAT'L SEE TABLE	FINISH SEE TABLE
		APPD. Wang HX	DWG.NO. DWG-USB CM-004	A	PART NO. SEE TABLE
					SIZE A4