
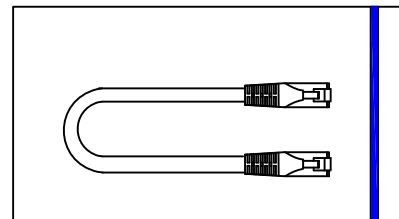


Printing:TYPE CM 24AWG/4PRS 75°C TIA/EIA-568B.2 CAT5E Patch Cable

Pin Assignment:

P1:	1	2	3	4	5	6	7	8
	Orange	Orange	Green	Blue	Blue	Green	Brown	Brown
	White	White	White	White	White	White	White	
P2:	1	2	3	4	5	6	7	8

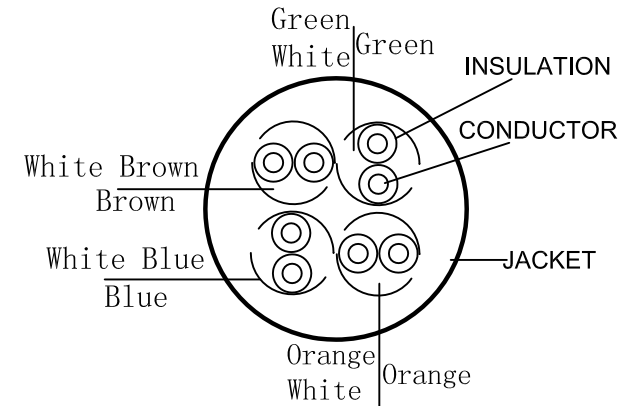

Packaging:PE bag

NOTES:

- 1.100% Open/Short Test
- 2.Data Transfer
- 3.Compliant With RoHS
- 4.RJ45 Plug Operating Temperature:
- 40°C to +85°C
- 5.RJ45 Plastic housing, Nickel Plated

5	Harness	120mm black	1PCS
4	Zip-lock bag	PE BAG	1PCS
3	Outer Molding	PVC 60P Blue	8g
2	Connector	8P8C/30U	2PCS
1	Wire	24AWG 7/0.2CCA*4P OD5.2 MM	1PCS
No.	Item	Specification	Qty.

UNIT	mm	Projection		Xmultiple Technologies, Inc.			
TOLERANCES				TITLE			
L<1.5M ± 10				RJ45 CAT5E Ethernet UTP Cable 15cm length			
1.5M<L<5.0M ± 20							
5.0M<L<10 M ± 40							
L>10 M ± 50							
DRAWN	MING	DATE	2014/05/05	PART NO.	XCAB-CAT5E-15UTP		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A0