


Drawing for Package

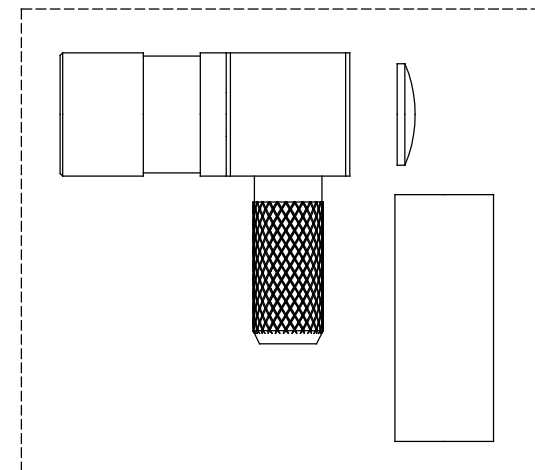

(RoHS Compliant)
Pb ≤ 4 wt%
Cd ≤ 75 ppm

NO	DESCRIPTION	MATERIAL	QTY	FINISH	ITEM #	CODE #
7	FERRULE	BRASS	1	GOLD	3.8x3.2x9.5金	C2700
6	COVER	BRASS	1	GOLD	TC-2403J-9	C3604
5	BODY	BRASS	1	GOLD	TC-2403J-1	C3604
4	CENTER PIN	BeCu	1	GOLD (3u ^r)	TC-2403J-2-3u	C1730
3	INSULATOR	TEFLON	1	-	TC-2403J-3	ASTM D1710
2	INNER CONTACT	BeCu	1	GOLD	TC-2403J-10	C1730
8	SHELL	BRASS	1	GOLD	TC-2403J-8	C3604

DIMENSIONS(mm)	TOLERANCE	DRAWING	DESCRIPTION
0-5mm	±0.05	DESIGNED	SSMB Plug R/A Crimp for RG174
5-10mm	±0.1	CHECKER	
10-15mm	±0.2	APPROVED	
15-20mm	±0.3	UNIT: M/M	
20mm ABOVE	±0.4	SCALE 7:1	

PRODUCT NUMBER		VERSION
XRF-2403J-TBGG/1/		A00
Xmultiple Technologies, Inc. ISO 9001-2008		