RoHS compliant | *PRELIMINARY*

REV.	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD.
X0.1			NEW DESIGN	2014/08/22	xiaoli	Bill

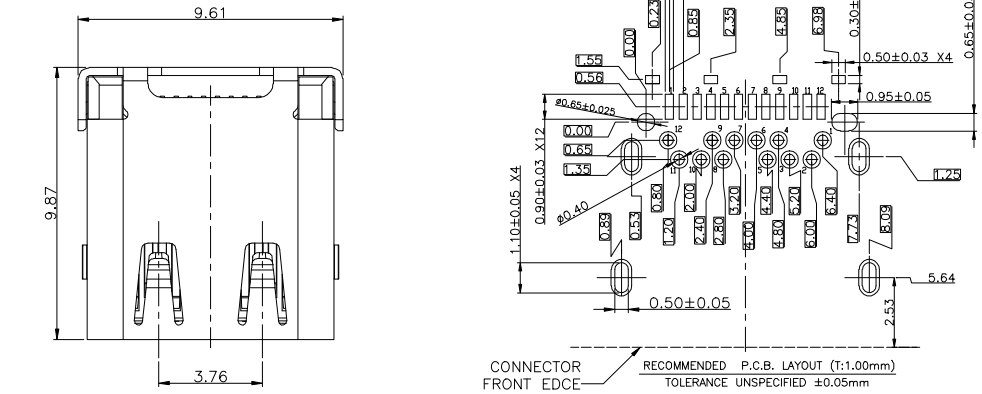

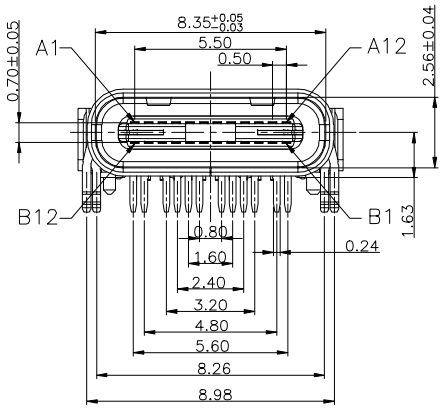

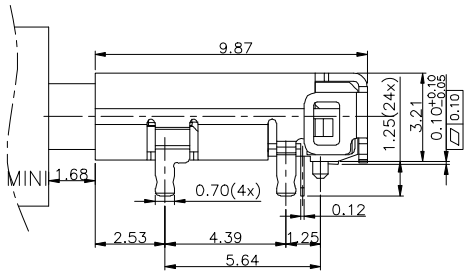

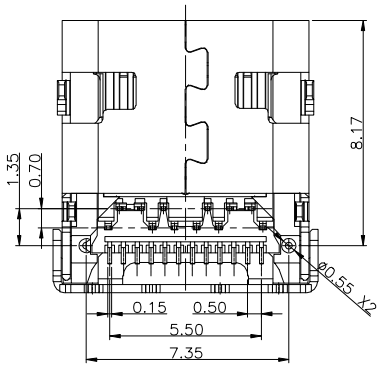



ORDERING INFORMATION

3C U 024 S – * N 1 00 B R * 0*
(1) (2) (3) (4) (5) (6) (7) (8) (9) (10)(11)

1. SERIES NO.
   3C: USB TYPE C CONNECTOR
2. TAIL CONSTRUCTION TYPE
   U: SMT+H/T TYPE
3. NUMBER OF PIN
   024: 24 POSITIONS
4. CONTACT & CONNECTIONG TYPES:
   S: SOCKET
5. TEMINAL PLATING:
   0: CONTACT AREA:G/F, SOLDER AREA:Matte Sn .UNDER NICKEL
   2: CONTACT AREA:15u" Au,SOLDER AREA:Matte Sn .UNDER NICKEL
   3: CONTACT AREA:30u" Au,SOLDER AREA:Matte Sn .UNDER NICKEL
6. SHELL PLATING
   N: PLATING NI
7. ENVIRONMENTAL.
   1: ROSH
8. COPLANARITY.
   B: COPLANARITY LEVEL OF CONTROL
9. PACKING.
   R: TAPE REEL PACKING
   T: TRAY PACKING
10. COVER.
    A: THE BACK COVER
11. SEPUENCE NO.
    01: H=1.63mm

	A		B
1	GND	12	GND
2	TX+	11	RX−
3	TX−	10	RX+
4	VBUS	9	PWR
5	RUF	8	CC
6	D−	7	D+
7	D+	6	D−
8	CC	5	RFU
9	VBUS	4	PWR
10	RX+	3	TX+
11	RX−	2	TX−
12	GND	1	GND

MATERIAL:

FINISH:

TOLERANCE UNLESS SPECIFIED:
.0 0 0 ± 0.10
.0 0 ± 0.20
.0 ± 0.30
. ± 0.50
ANGLE ± 2°

DRAWN: ChenXiaoli 2014/08/11
DESIGNER: ChenXiaoli 2014/08/11
CHECKED: Lujun 2014.08.11
APPROVED: Bill 2014.08.11

Xmultiple Technologies Inc.

SCALE: 1:1 | UNIT: mm

NAME: USB TYPE C FEMALE R/A SMT COVER TYPE

SHEET: 1/1

DRAWING NO.: R−XXXXX−XX

REV.: X0.1

A4 | RS13CG011